# LORO-X BALKONDIREKTABTL.2TLG.O.WD.SIEB R

**LORO-X balcony direct drain, two-piece, without insulation, H series DN 70**

## Descripción

LORO-X direct balcony drain, series H, two-piece, without thermal insulation, vertical outlet, with pre-fitted connecting collar made of bitumen/EPDM composite, according to DIN EN 1253 with raised quality standard, made of steel, hot-dip galvanized, with long-life coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, consisting of drain pot, connecting collar, clamping ring without drainage openings, extension cartridge (for installation height 60 - 120 mm), connecting collar, clamping ring, drainage ring, holding fixture for strainer (for installation height 35 - 150 mm), strainer for pipe opening for balcony floors, DN70

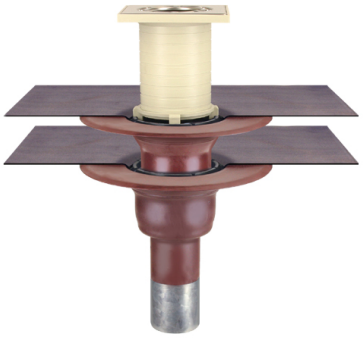

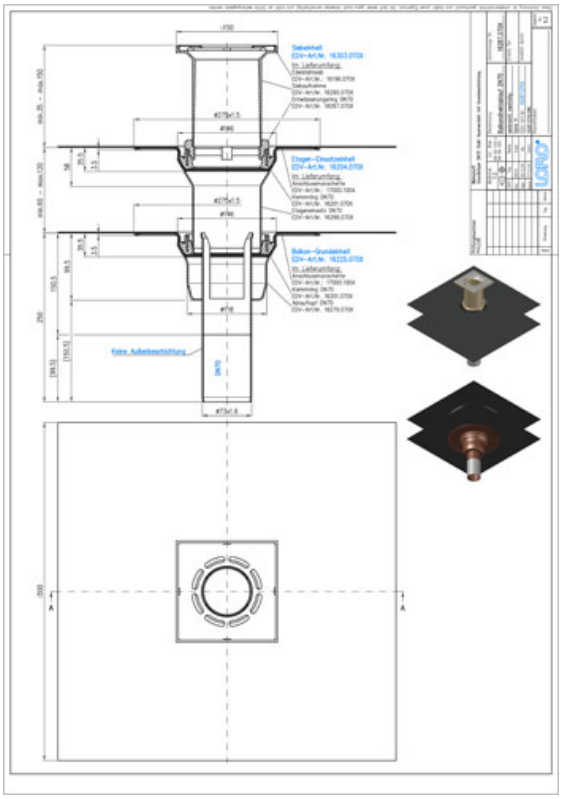

## Datos del artículo

| | |
|---|---|
| Código EAN | 4038088058589 |
| Clase ETIM | EC004949 |
| Diámetro nominal | DN 70 |
| Medidas exteriores (AxAxL) | 275 x 275 x 521 mm |
| Peso | 6,20 Kg (STK) |
| Grupo de productos | 4 |
| Número de arancel aduanero | 73089098 |
| Material / Color | Stahl feuerverzinkt, Silber |

## Nota de uso

Die Serie H beinhaltet Balkonabläufe mit Anschlussmanschette für die Anbindung an Abdichtungsbahnen. Die Anschlussmanschette besteht aus Bitumen/EPDM Verbund (Standard) oder auf Anfrage aus PVC oder ECB und wird werkseitig vormontiert. Im Standard wird die Serie H aus feuerverzinktem Stahl mit zusätzlicher Beschichtung gefertigt. Auf Anfrage ist auch die Fertigung aus massivem Kupfer möglich. Einsatzgebiete Balkone und Terrassen mit Abdichtungsbahnen, Fliesen- oder Plattenbelag. Weitere Einsatzbeispiele finden Sie mit detailierter Beschreibung in unserem Prospekt LORO-X Balkonentwässerung.

## Descargas

Alles online

Instrucciones de instalación (PDF)
Certificado (PDF)
CAD 2D (DXF)
BIM 3D (IFC)
Dibujo dimensional (PDF)
Aufbauschema (PDF)
CAD 3D (DWG)
Folleto (PDF)
Ficha técnica del sistema LX 904
BIM 3D (STEP)