LX-DIREKTABLAUF SR. IK 160MM DN70

LORO-X balcony direct drain 160 mm with clamping collar and bell series IK DN 70

Descrizione

LORO-X direct balcony drain, series IK with dome and clamping collar, vertical outlet, according to DIN EN 1253 with raised quality standard, made of steel, hot-dip galvanized, with long-life coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, for slab thickness 160 mm, without strainer, DN70

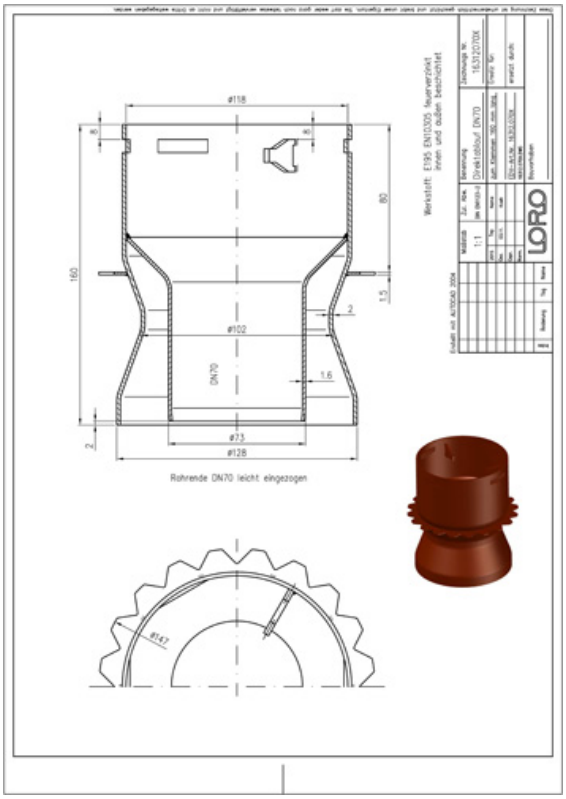

Dati articolo

Codice EAN	**4038088066669**
Classe ETIM	**EC004949**
Diametro nominale	**DN 70**
Misure esterne (AxLxP)	**148 x 148 x 160 mm**
Peso	**1,40 Kg (STK)**
Gruppo prodotti	**4**
Numero tariffa doganale	**73089098**
Materiale / Colore	**Stahl feuerverzinkt, Silber**

Note d'uso

Serie IK beinhaltet Direktabläufe "mit Glocke" und Klemmkragen für den Einbau in Kernbohrungen und ist insbesondere für den Fall der Sanierung geeignet. Als Glocke wird die glockenähnliche Bauform der Unterseite der Serie I und IK zum einbetonieren bezeichnet. Die Glocke besteht dabei aus einem Innenrohr (medienführend) und einem ringspaltbildenden Außenrohr. Zwischen beiden entsteht ein Ringspalt, in den die Muffe der Fallleitung von unten aufgeschoben werden kann. Auf eine separate Schalungsglocke kann somit verzichtet werden. Einsatzgebiete Balkone aus Betonfertigteilen aus wasserundurchlässigem Beton, ohne zusätzlichen Belag.

Download

Alles online

- Istruzioni di installazione (PDF)
- Certificato (PDF)
- Scheda tecnica del sistema LX 1036
- CAD 2D (DXF)
- BIM 3D (IFC)
- Disegno dimensionale (PDF)
- Aufbauschema (PDF)
- Scheda tecnica del sistema LX 991
- CAD 3D (DWG)
- Brochure (PDF)
- Scheda tecnica del sistema LX 1035
- Scheda tecnica del sistema LX 992
- BIM 3D (STEP)