LORO-X DIRECT DRAIN WITH BELL TYPE I

LORO-X balcony direct drain series I 140 mm with bell DN 50

Descripción

LORO-X direct balcony drain, series I with dome, vertical outlet, according to DIN EN 1253 with raised quality standard, made of steel, hot-dip galvanized, with long-life coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, for slab thickness 140 mm, without strainer, DN50

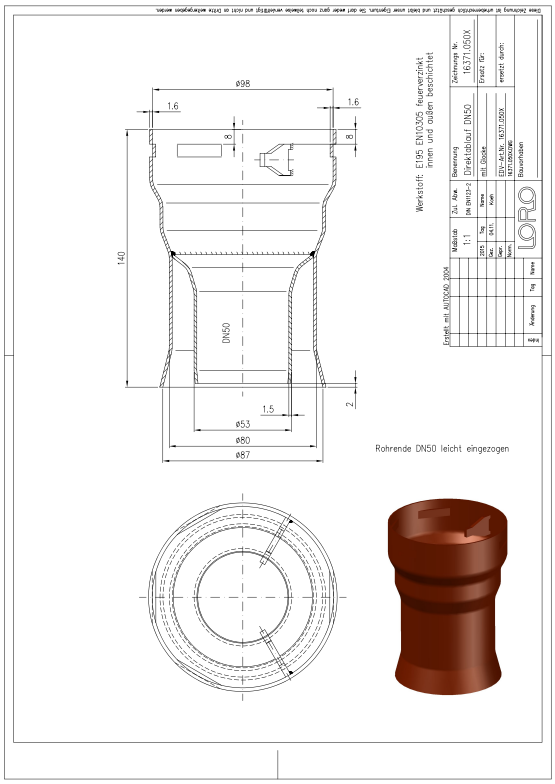

Datos del artículo

Código EAN	4038088009741
Clase ETIM	EC004949
Diámetro nominal	DN 50
Medidas exteriores (AxAxL)	101 x 101 x 140 mm
Peso	0,80 Kg (STK)
Grupo de productos	4
Número de arancel aduanero	73089098
Material / Color	Stahl feuerverzinkt, Silber

Nota de uso

Serie I beinhaltet Direktabläufe "mit Glocke" als senkrechte und seitliche Ausführung. Für die Sanierung von Balkonen (mit Kernbohrung) empfehlen wir die Serie IK mit Klemmkragen. Glocke Als Glocke wird die glockenähnliche Bauform der Unterseite der Serie I und IK zum einbetonieren bezeichnet. Die Glocke besteht dabei aus einem Innenrohr (medienführend) und einem ringspaltbildenden Außenrohr. Zwischen beiden entsteht ein Ringspalt, in den die Muffe der Fallleitung von unten aufgeschoben werden kann. Auf eine separate Schalungsglocke kann somit verzichtet werden. Einsatzgebiete Balkone aus Betonfertigteilen aus wasserundurchlässigem Beton, ohne zusätzlichen Belag.

Descargas

Alles online

- Instrucciones de instalación (PDF)
- Certificado (PDF)
- Ficha técnica del sistema LX 996
- CAD 2D (DXF)
- BIM 3D (IFC)
- Dibujo dimensional (PDF)
- Aufbauschema (PDF)
- Ficha técnica del sistema LX 989
- CAD 3D (DWG)
- Folleto (PDF)
- Ficha técnica del sistema LX 995
- Ficha técnica del sistema LX 990
- BIM 3D (STEP)