LORO-X DIRECT DRAIN WITH BELL TYPE I

LORO-X balcony direct drain series I 180 mm with bell DN 50

Descrição

LORO-X direct balcony drain, series I with dome, vertical outlet, according to DIN EN 1253 with raised quality standard, made of steel, hot-dip galvanized, with long-life coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, for slab thickness 180 mm, without strainer, DN50

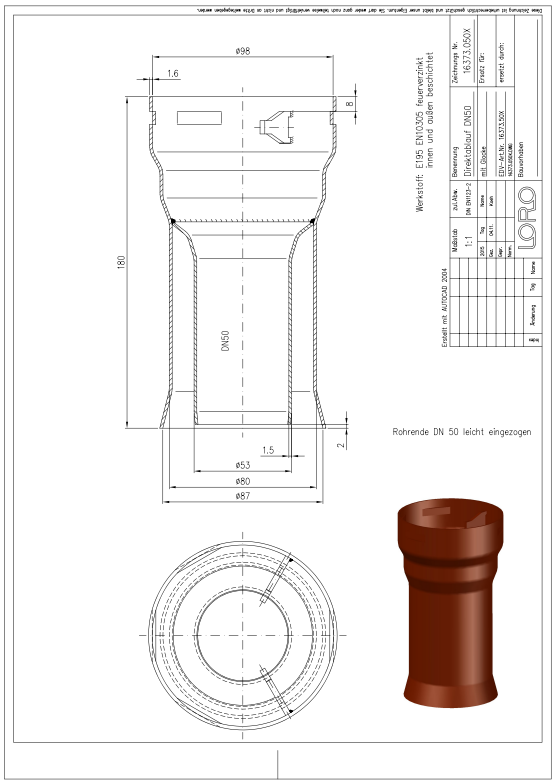

Dados do artigo

Código EAN	4038088009802
Classe ETIM	EC004949
Diâmetro nominal	DN 50
Medidas exteriores (AxLxP)	101 x 101 x 180 mm
Peso	1,00 Kg (STK)
Grupo de produtos	4
Número de pauta aduaneira	73089098
Material / Cor	Stahl feuerverzinkt, Silber

Nota de utilização

Serie I beinhaltet Direktabläufe "mit Glocke" als senkrechte und seitliche Ausführung. Für die Sanierung von Balkonen (mit Kernbohrung) empfehlen wir die Serie IK mit Klemmkragen. Glocke Als Glocke wird die glockenähnliche Bauform der Unterseite der Serie I und IK zum einbetonieren bezeichnet. Die Glocke besteht dabei aus einem Innenrohr (medienführend) und einem ringspaltbildenden Außenrohr. Zwischen beiden entsteht ein Ringspalt, in den die Muffe der Fallleitung von unten aufgeschoben werden kann. Auf eine separate Schalungsglocke kann somit verzichtet werden. Einsatzgebiete Balkone aus Betonfertigteilen aus wasserundurchlässigem Beton, ohne zusätzlichen Belag.

Transferências

Alles online

- Instruções de instalação (PDF)
- Homologação (PDF)
- Ficha técnica do sistema LX 1008
- CAD 2D (DXF)
- BIM 3D (IFC)
- Desenho cotado (PDF)
- Aufbauschema (PDF)
- Ficha técnica do sistema LX 989
- CAD 3D (DWG)
- Brochura (PDF)
- Ficha técnica do sistema LX 1007
- Ficha técnica do sistema LX 990
- BIM 3D (STEP)