## LORO-X BALKONDIREKTABL.2TLG.M.WD.SIEB RD

**LORO-X balcony direct drain, two-piece with heat insulation, round sieve DN 100**

### Opis

LORO-X direct balcony drain, series H, two-piece, with thermal insulation, vertical outlet, with pre-fitted connecting collar made of bitumen/EPDM composite, according to DIN EN 1253 with raised quality standard, made of steel, hot-dip galvanized, with long-life coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, consisting of drain pot, connecting collar, clamping ring without drainage openings, extension cartridge (for installation height 60 - 120 mm), connecting collar, clamping ring, drainage ring, holding fixture for strainer (for installation height 35 - 150 mm), strainer for pipe opening for balcony floors, DN100

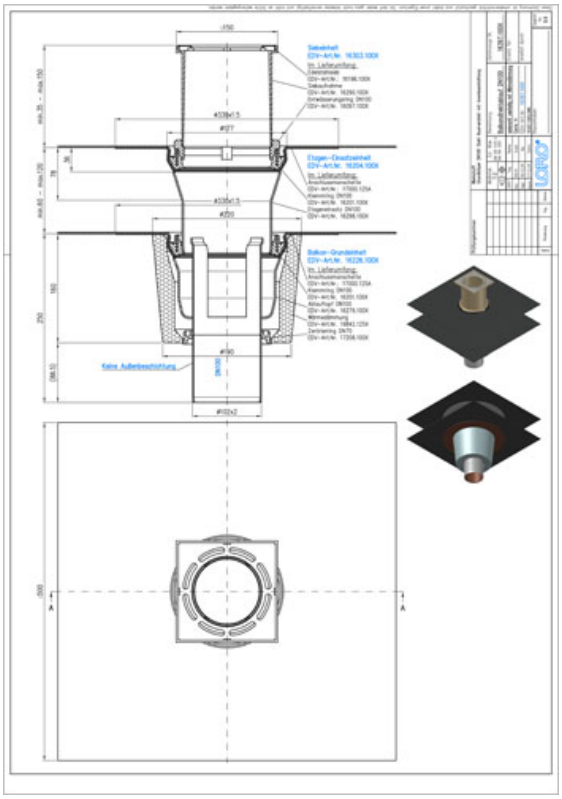

### Podatki o izdelku

| | |
|---|---|
| EAN koda | 4038088058619 |
| ETIM razred | EC004949 |
| Nazivni premer | DN 100 |
| Zunanje mere (VxŠxD) | 330 x 330 x 521 mm |
| Teža | 8,60 Kg (STK) |
| Skupina izdelkov | 4 |
| Carinska tarifna številka | 73089098 |
| Material / Barva | Stahl feuerverzinkt, Silber |

### Opomba za uporabo

Die Serie H beinhaltet Balkonabläufe mit Anschlussmanschette für die Anbindung an Abdichtungsbahnen. Die Anschlussmanschette besteht aus Bitumen/EPDM Verbund (Standard) oder auf Anfrage aus PVC oder ECB und wird werkseitig vormontiert. Im Standard wird die Serie H aus feuerverzinktem Stahl mit zusätzlicher Beschichtung gefertigt. Auf Anfrage ist auch die Fertigung aus massivem Kupfer möglich. Einsatzgebiete Balkone und Terrassen mit Abdichtungsbahnen, Fliesen- oder Plattenbelag. Weitere Einsatzbeispiele finden Sie mit detailierter Beschreibung in unserem Prospekt LORO-X Balkonentwässerung.

### Prenosi

Alles online

Navodila za vgradnjo (PDF)
Certifikat (PDF)
Podatkovni list sistema LX 1074
BIM 3D (STEP)
Merska risba (PDF)
Aufbauschema (PDF)
CAD 2D (DXF)
BIM 3D (IFC)
Prospekt (PDF)
Podatkovni list sistema LX 1073
CAD 3D (DWG)