LX-BALKONDA ST.FVZ 2TLG.SENKR.M.ASM WD.

LORO-X direct balcony drain, steel, two-piece, vertical, insulated, sieve without pipe penetration DN70

Описание

LORO-X direct balcony drain, series H, two-piece, with thermal insulation, vertical outlet, with pre-fitted connecting collar made of bitumen/EPDM composite, according to DIN EN 1253 with raised quality standard, made of steel, hot-dip galvanized, with long-life coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, consisting of drain pot, connecting collar, clamping ring without drainage openings, extension cartridge (for installation height 60 - 120 mm), connecting collar, clamping ring, drainage ring, holding fixture for strainer (for installation height 35 - 150 mm), strainer for upper balconies, DN70

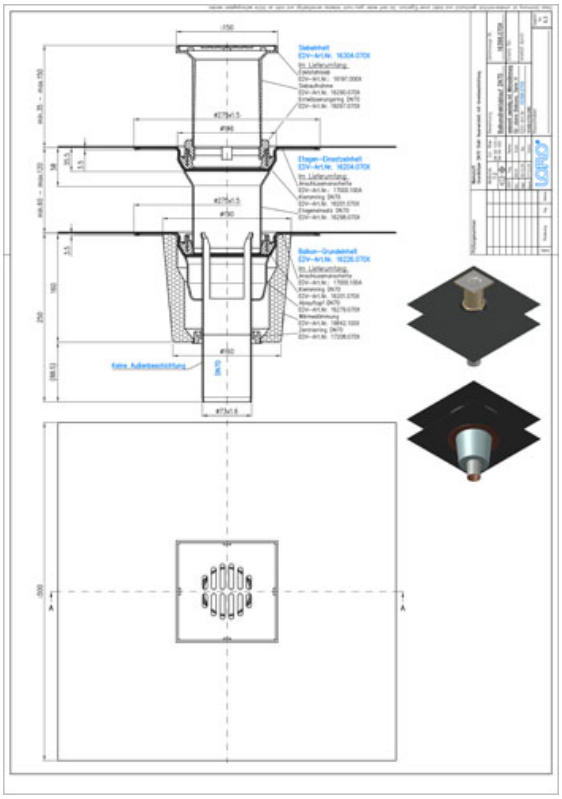

Данни за артикула

EAN код	4038088058640
ETIM клас	EC004949
Номинален диаметър	DN 70
Външни размери (ВхШхД)	275 x 275 x 521 mm
Тегло	6,30 Kg (STK)
Продуктова група	4
Митнически тарифен номер	73089098
Материал / Цвят	Stahl feuerverzinkt, Silber

Забележка за употреба

Die Serie H beinhaltet Balkonabläufe mit Anschlussmanschette für die Anbindung an Abdichtungsbahnen. Die Anschlussmanschette besteht aus Bitumen/EPDM Verbund (Standard) oder auf Anfrage aus PVC oder ECB und wird werkseitig vormontiert. Im Standard wird die Serie H aus feuerverzinktem Stahl mit zusätzlicher Beschichtung gefertigt. Auf Anfrage ist auch die Fertigung aus massivem Kupfer möglich. Einsatzgebiete Balkone und Terrassen mit Abdichtungsbahnen, Fliesen- oder Plattenbelag. Weitere Einsatzbeispiele finden Sie mit detailierter Beschreibung in unserem Prospekt LORO-X Balkonentwässerung.

Изтегляния

Alles online

Инструкция за монтаж (PDF)
Сертификат (PDF)
CAD 2D (DXF)
BIM 3D (IFC)
CAD чертеж (PDF)
Aufbauschema (PDF)
CAD 3D (DWG)
Брошура (PDF)
Системен технически лист LX 902
BIM 3D (STEP)