LORO-X BALKONDIREKTABL.2TLG.M.WD.ENDSIEB

LORO-X balcony direct drain, two-part, with insulation, end sieve DN 100

Kuvaus

LORO-X direct balcony drain, series H, two-piece, with thermal insulation, vertical outlet, with pre-fitted connecting collar made of bitumen/EPDM composite, according to DIN EN 1253 with raised quality standard, made of steel, hot-dip galvanized, with long-life coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, consisting of drain pot, connecting collar, clamping ring without drainage openings, extension cartridge (for installation height 60 - 120 mm), connecting collar, clamping ring, drainage ring, holding fixture for strainer (for installation height 35 - 150 mm), strainer for upper balconies, DN100

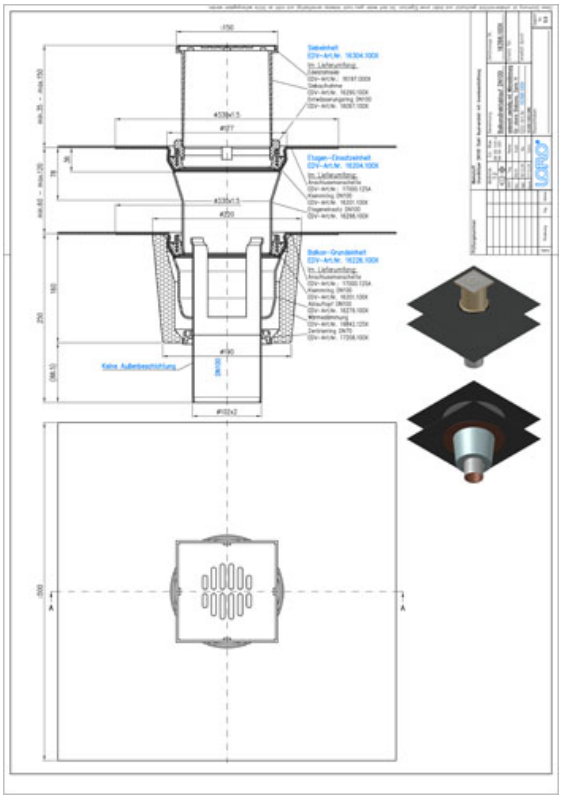

Tuotetiedot

EAN-koodi	**4038088058657**
ETIM-luokka	**EC004949**
Nimellishalkaisija	**DN 100**
Ulkomitat (KxLxS)	**330 x 330 x 521 mm**
Paino	**8,60 Kg (STK)**
Tuoteryhmä	**4**
Tullitariffin numero	**73089098**
Materiaali / Väri	**Stahl feuerverzinkt, Silber**

Käyttöohje

Die Serie H beinhaltet Balkonabläufe mit Anschlussmanschette für die Anbindung an Abdichtungsbahnen. Die Anschlussmanschette besteht aus Bitumen/EPDM Verbund (Standard) oder auf Anfrage aus PVC oder ECB und wird werkseitig vormontiert. Im Standard wird die Serie H aus feuerverzinktem Stahl mit zusätzlicher Beschichtung gefertigt. Auf Anfrage ist auch die Fertigung aus massivem Kupfer möglich. Einsatzgebiete Balkone und Terrassen mit Abdichtungsbahnen, Fliesen- oder Plattenbelag. Weitere Einsatzbeispiele finden Sie mit detailierter Beschreibung in unserem Prospekt LORO-X Balkonentwässerung.

Lataukset

Alles online

Asennusohje (PDF)
Hyväksyntä (PDF)
CAD 2D (DXF)
BIM 3D (IFC)
Mittapiirustus (PDF)
Aufbauschema (PDF)
CAD 3D (DWG)
Esite (PDF)
Järjestelmän datalehti LX 1072
BIM 3D (STEP)