
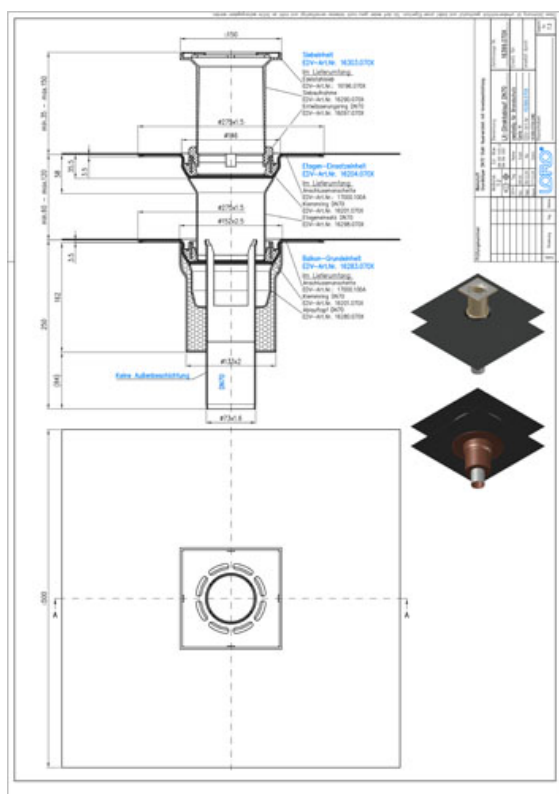


## LORO-X DIREKTABL.F.BRANDSCHUTZ,SENKR.2TL

LORO-X direct drain for fire protection vertical two-part with sieve for balcony floors series H DN 70

### Descrizione

LORO-X direct balcony drain, fire protection system, series H, general building authority test certificate no. P-MPA-E-09-010, two-piece, with thermal insulation, vertical outlet, with pre-fitted connecting collar made of bitumen/EPDM composite, according to DIN EN 1253 with raised quality standard, made of steel, hot-dip galvanized, with long-life coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, consisting of drain pot, connecting collar, clamping ring without drainage openings, extension cartridge (for installation height 60 - 120 mm), connecting collar, clamping ring, drainage ring, holding fixture for strainer (for installation height 35 - 150 mm), strainer for pipe opening for balcony floors, DN70



### Dati articolo

|                         |                             |
|-------------------------|-----------------------------|
| Codice EAN              | 4038088096376               |
| Classe ETIM             | EC011398                    |
| Diametro nominale       | DN 70                       |
| Peso                    | 8,60 Kg (STK)               |
| Gruppo prodotti         | 4                           |
| Numero tariffa doganale | 73089098                    |
| Materiale / Colore      | Stahl feuerverzinkt, Silber |

### Note d'uso

Die Serie H beinhaltet Balkonabläufe mit Anschlussmanschette für die Anbindung an Abdichtungsbahnen. Die Anschlussmanschette besteht aus Bitumen/EPDM Verbund (Standard) oder auf Anfrage aus PVC oder ECB und wird werkseitig vormontiert.

### Download



Alles online

[Istruzioni di installazione \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Disegno dimensionale \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Brochure \(PDF\)](#)

[BIM 3D \(STEP\)](#)