LORO-X DIREKTABL.F.BRANDSCHUTZ,SENKR.2TL

LORO-X direct drain for fire protection vertical in two parts with sieve for balcony floors series H DN 100

Opis

LORO-X direct balcony drain, fire protection system, series H, general building authority test certicifate no. P-MPA-E-09-010, two-piece, with thermal insulation, vertical outlet, with pre-fitted connecting collar made of bitumen/EPDM composite, according to DIN EN 1253 with raised quality standard, made of steel, hot-dip galvanized, with long-life coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, consisting of drain pot, connecting collar, clamping ring without drainage openings, extension cartridge (for installation height 60 - 120 mm), connecting collar, clamping ring, drainage ring, holding fixture for strainer (for installation height 35 - 150 mm), strainer for pipe opening for balcony floors, DN100



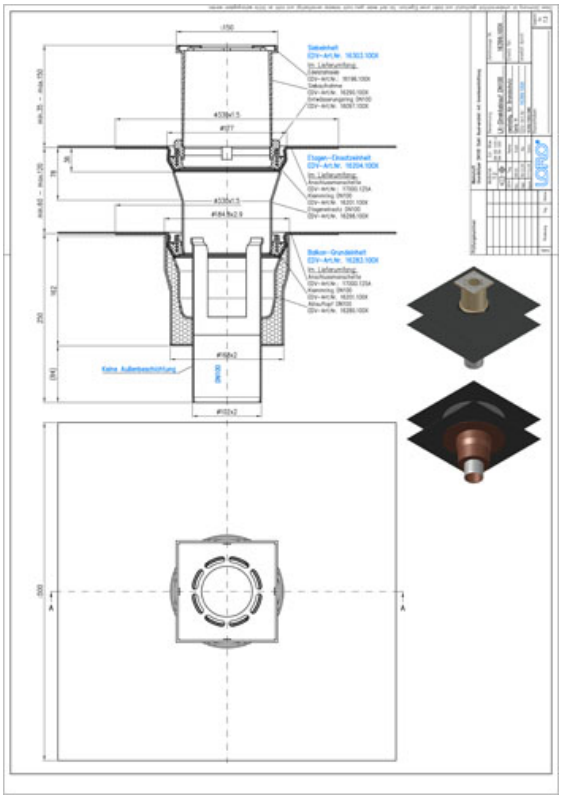

Podatki o izdelku

EAN koda	**4038088096383**
ETIM razred	**EC011398**
Nazivni premer	**DN 100**
Teža	**10,50 Kg (STK)**
Skupina izdelkov	**4**
Carinska tarifna številka	**73089098**
Material / Barva	**Stahl feuerverzinkt, Silber**

Opomba za uporabo

Die Serie H beinhaltet Balkonabläufe mit Anschlussmanschette für die Anbindung an Abdichtungsbahnen. Die Anschlussmanschette besteht aus Bitumen/EPDM Verbund (Standard) oder auf Anfrage aus PVC oder ECB und wird werkseitig vormontiert.

Prenosi

Alles online

Navodila za vgradnjo (PDF)
CAD 2D (DXF)
BIM 3D (IFC)
Merska risba (PDF)
CAD 3D (DWG)
Prospekt (PDF)
BIM 3D (STEP)