

# LORO-X DIREKTABL.F.BRANDSCHUTZ,SENKR.2TL

**LORO-X direct drain for fire protection vertical in two parts with sieve for balcony floors series H DN 100**

## Voce di capitolato

LORO-X direct balcony drain, fire protection system, series H, general building authority test certificate no. P-MPA-E-09-010, two-piece, with thermal insulation, vertical outlet, with pre-fitted connecting collar made of bitumen/EPDM composite, according to DIN EN 1253 with raised quality standard, made of steel, hot-dip galvanized, with long-life coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, consisting of drain pot, connecting collar, clamping ring without drainage openings, extension cartridge (for installation height 60 - 120 mm), connecting collar, clamping ring, drainage ring, holding fixture for strainer (for installation height 35 - 150 mm), strainer for pipe opening for balcony floors, DN100



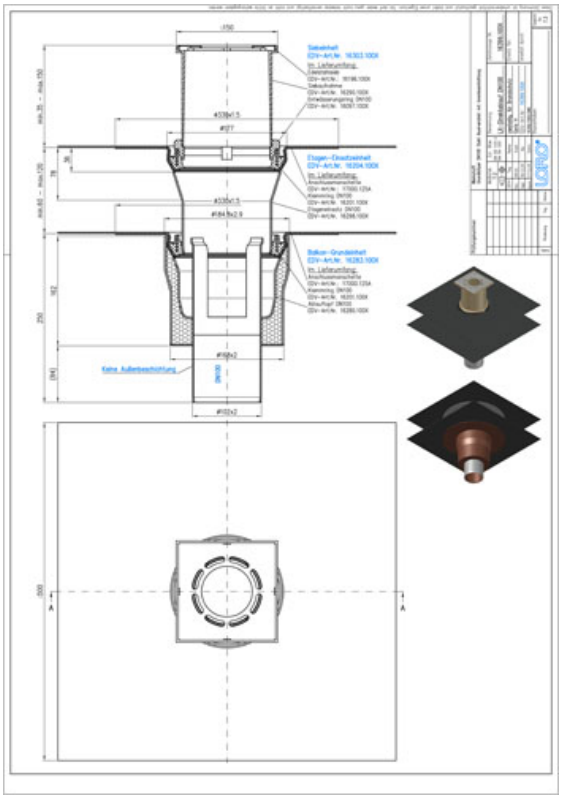

## Dati articolo

| | |
|---|---|
| Codice EAN | **4038088096383** |
| Classe ETIM | **EC011398** |
| Diametro nominale | **DN 100** |
| Peso | **10,50 Kg (STK)** |
| Gruppo prodotti | **4** |
| Numero tariffa doganale | **73089098** |
| Materiale / Colore | **Stahl feuerverzinkt, Silber** |

## Note d'uso

Die Serie H beinhaltet Balkonabläufe mit Anschlussmanschette für die Anbindung an Abdichtungsbahnen. Die Anschlussmanschette besteht aus Bitumen/EPDM Verbund (Standard) oder auf Anfrage aus PVC oder ECB und wird werkseitig vormontiert.

## Download

Alles online

Istruzioni di installazione (PDF)
CAD 2D (DXF)
BIM 3D (IFC)
Disegno dimensionale (PDF)
CAD 3D (DWG)
Brochure (PDF)
BIM 3D (STEP)