
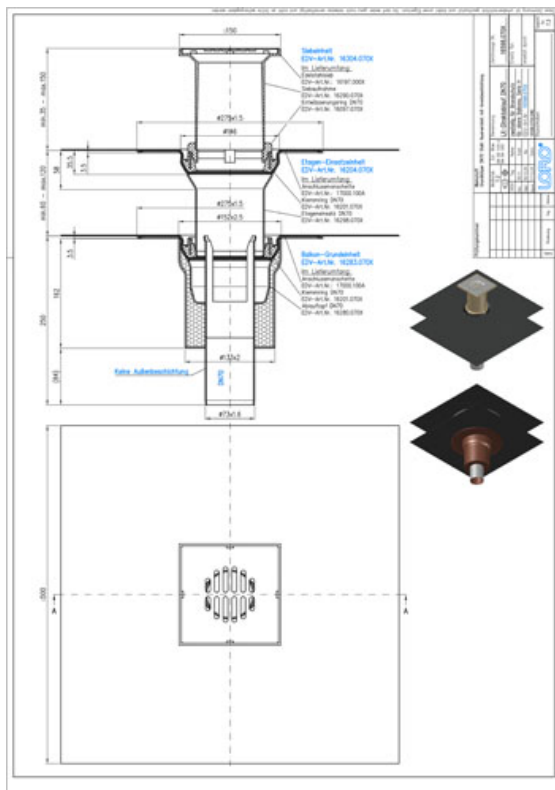


LX-BALKONDA ST.FVZ.M.BRANDSCH.2 TLG.

LORO-X direct drain for fire protection vertical two-part with sieve for upper balconies series H DN 70

Descrizione

LORO-X direct balcony drain, fire protection system, series H, general building authority test certificate no. P-MPA-E-09-010, two-piece, with thermal insulation, vertical outlet, with pre-fitted connecting collar made of bitumen/EPDM composite, according to DIN EN 1253 with raised quality standard, made of steel, hot-dip galvanized, with long-life coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, consisting of drain pot, connecting collar, clamping ring without drainage openings, extension cartridge (for installation height 60 - 120 mm), connecting collar, clamping ring, drainage ring, holding fixture for strainer (for installation height 35 - 155 mm), strainer for upper balconies, DN70

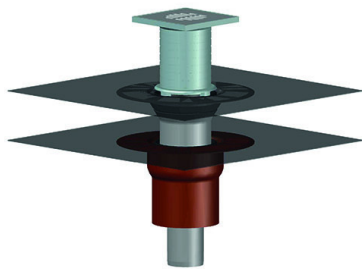

Date articol

Cod EAN	4038088104804
Clasă ETIM	EC010284
Diametru nominal	DN 70
Dimensiuni exterioare (ÎxLxA)	275 x 275 x 525 mm
Greutate	7,30 Kg (STK)
Grupă de produse	4
Număr tarif vamal	73089098
Material / Culoare	Stahl feuerverzinkt, Silber

Notă de utilizare

Die Serie H beinhaltet Balkonabläufe mit Anschlussmanschette für die Anbindung an Abdichtungsbahnen. Die Anschlussmanschette besteht aus Bitumen/EPDM Verbund (Standard) oder auf Anfrage aus PVC oder ECB und wird werkseitig vormontiert.

Descărcări



Alles online

[Instrucțiuni de montaj \(PDF\)](#)

CAD 2D (DXF)

BIM 3D (IFC)

[Desen CAD \(PDF\)](#)

CAD 3D (DWG)

[Brosură \(PDF\)](#)

BIM 3D (STEP)