

LX-BALKONDA ST.FVZ.M.BRANDSCH.2 TLG.

LORO-X direct drain for fire protection vertical two-part with sieve for upper balconies series H DN 70

Κείμενο προδιαγραφών

LORO-X direct balcony drain, fire protection system, series H, general building authority test certificate no. P-MPA-E-09-010, two-piece, with thermal insulation, vertical outlet, with pre-fitted connecting collar made of bitumen/EPDM composite, according to DIN EN 1253 with raised quality standard, made of steel, hot-dip galvanized, with long-life coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, consisting of drain pot, connecting collar, clamping ring without drainage openings, extension cartridge (for installation height 60 - 120 mm), connecting collar, clamping ring, drainage ring, holding fixture for strainer (for installation height 35 - 155 mm), strainer for upper balconies, DN70

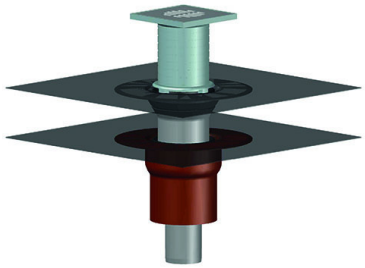

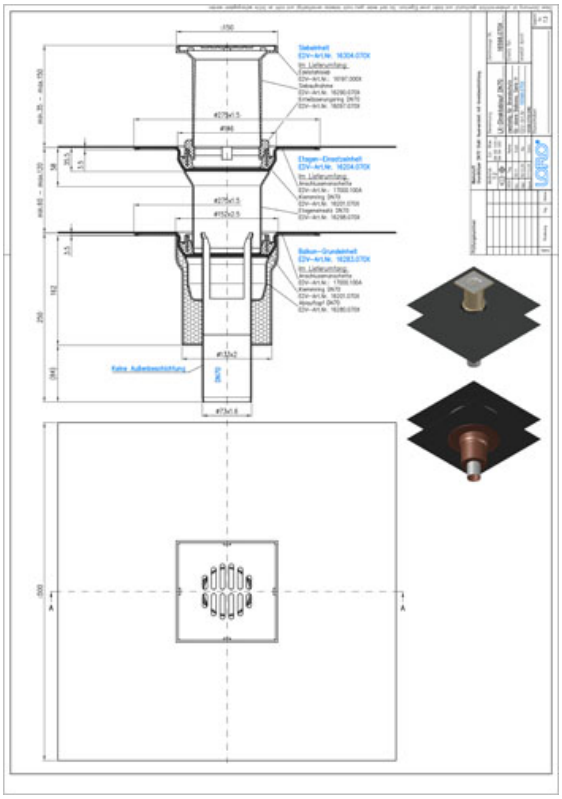

Στοιχεία προϊόντος

Κωδικός EAN	**4038088104804**
Κατηγορία ETIM	**EC010284**
Ονομαστική διάμετρος	**DN 70**
Εξωτερικές διαστάσεις (ΥxΠxΜ)	**275 x 275 x 525 mm**
Βάρος	**7,30 Kg (STK)**
Ομάδα προϊόντων	**4**
Δασμολογικός αριθμός	**73089098**
Υλικό / Χρώμα	**Stahl feuerverzinkt, Silber**

Σημείωση χρήσης

Die Serie H beinhaltet Balkonabläufe mit Anschlussmanschette für die Anbindung an Abdichtungsbahnen. Die Anschlussmanschette besteht aus Bitumen/EPDM Verbund (Standard) oder auf Anfrage aus PVC oder ECB und wird werkseitig vormontiert.

Λήψεις

Alles online

Οδηγίες εγκατάστασης (PDF)
CAD 2D (DXF)
BIM 3D (IFC)

Σχέδιο διαστάσεων (PDF)
CAD 3D (DWG)

Φυλλάδιο (PDF)
BIM 3D (STEP)