LX-BALKONDA ST.FVZ.M.BRANDSCH.2 TLG.

LORO-X direct drain for fire protection, vertical, two-part with sieve for upper balconies series H DN 100

Description

LORO-X direct balcony drain, fire protection system, series H, general building authority test certicifate no. P-MPA-E-09-010, two-piece, with thermal insulation, vertical outlet, with pre-fitted connecting collar made of bitumen/EPDM composite, according to DIN EN 1253 with raised quality standard, made of steel, hot-dip galvanized, with long-life coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, consisting of drain pot, connecting collar, clamping ring without drainage openings, extension cartridge (for installation height 60 - 120 mm), connecting collar, clamping ring, drainage ring, holding fixture for strainer (for installation height 35 - 155 mm), strainer for upper balconies, DN100

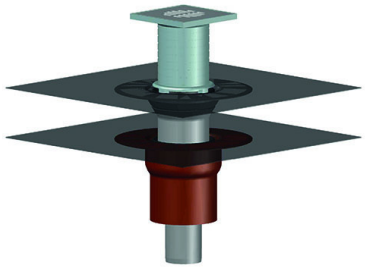

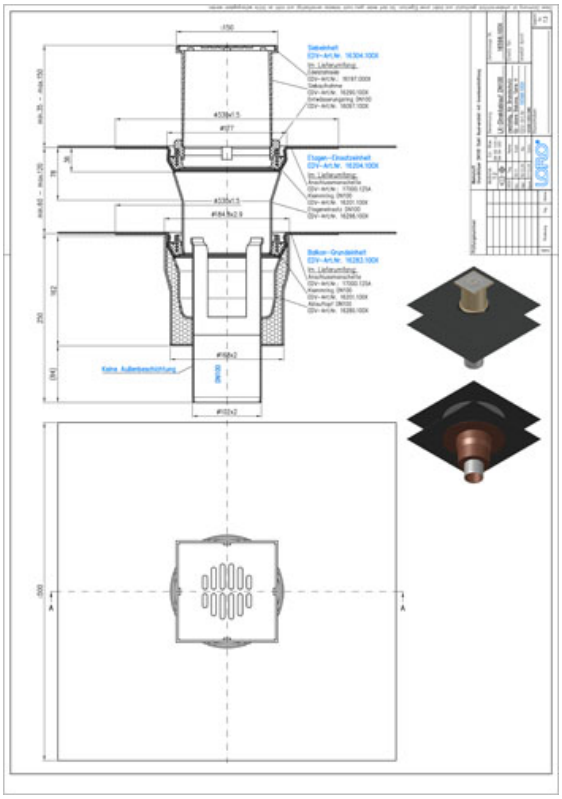

Article information

EAN Code	4038088104811
ETIM Class	EC010284
Nominal diameter	DN 100
Outside measurements (HxWxL)	330 x 330 x 525 mm
Weight	10,00 Kg (STK)
Product group	4
Customs tariff number	73089098
Material / Color	Stahl feuerverzinkt, Silber

Usage note

Die Serie H beinhaltet Balkonabläufe mit Anschlussmanschette für die Anbindung an Abdichtungsbahnen. Die Anschlussmanschette besteht aus Bitumen/EPDM Verbund (Standard) oder auf Anfrage aus PVC oder ECB und wird werkseitig vormontiert.

Downloads

Alles online

Installation (PDF)
CAD 2D (DXF)
BIM 3D (IFC)
CAD drawing (PDF)
CAD 3D (DWG)
Brochure (PDF)
BIM 3D (STEP)