
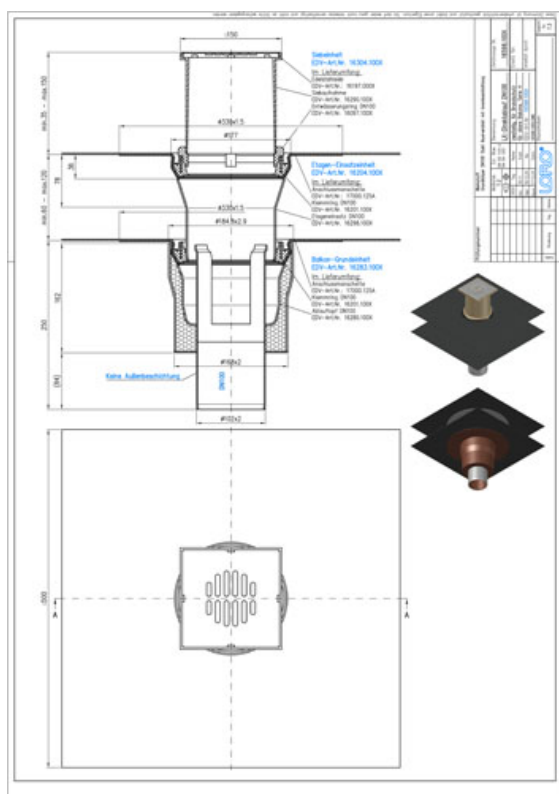


LX-BALKONDA ST.FVZ.M.BRANDSCH.2 TLG.

LORO-X direct drain for fire protection, vertical, two-part with sieve for upper balconies series H DN 100

Opis

LORO-X direct balcony drain, fire protection system, series H, general building authority test certificate no. P-MPA-E-09-010, two-piece, with thermal insulation, vertical outlet, with pre-fitted connecting collar made of bitumen/EPDM composite, according to DIN EN 1253 with raised quality standard, made of steel, hot-dip galvanized, with long-life coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, consisting of drain pot, connecting collar, clamping ring without drainage openings, extension cartridge (for installation height 60 - 120 mm), connecting collar, clamping ring, drainage ring, holding fixture for strainer (for installation height 35 - 155 mm), strainer for upper balconies, DN100

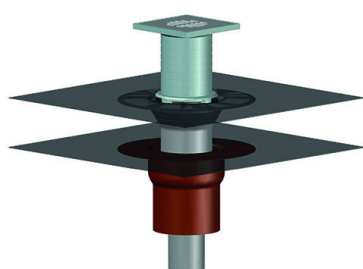

Dane artykułu

Kod EAN	4038088104811
Klasa ETIM	EC010284
Średnica nominalna	DN 100
Wymiary zewnętrzne (WxSxD)	330 x 330 x 525 mm
Waga	10,00 Kg (STK)
Grupa produktów	4
Numer taryfy celnej	73089098
Materiał / Kolor	Stahl feuerverzinkt, Silber

Wskazówki dotyczące użytkowania

Die Serie H beinhaltet Balkonabläufe mit Anschlussmanschette für die Anbindung an Abdichtungsbahnen. Die Anschlussmanschette besteht aus Bitumen/EPDM Verbund (Standard) oder auf Anfrage aus PVC oder ECB und wird werkseitig vormontiert.

Pobieranie



Alles online

[Instrukcja montażu \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Rysunek wymiarowy \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Broszura \(PDF\)](#)

[BIM 3D \(STEP\)](#)