LX-BALKONDA ST.FVZ.M.BRANDSCH.2 TLG.

LORO-X direct drain for fire protection, vertical, two-part with sieve for upper balconies series H DN 100

Popis

LORO-X direct balcony drain, fire protection system, series H, general building authority test certicifate no. P-MPA-E-09-010, two-piece, with thermal insulation, vertical outlet, with pre-fitted connecting collar made of bitumen/EPDM composite, according to DIN EN 1253 with raised quality standard, made of steel, hot-dip galvanized, with long-life coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, consisting of drain pot, connecting collar, clamping ring without drainage openings, extension cartridge (for installation height 60 - 120 mm), connecting collar, clamping ring, drainage ring, holding fixture for strainer (for installation height 35 - 155 mm), strainer for upper balconies, DN100

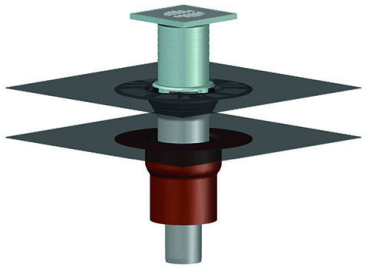

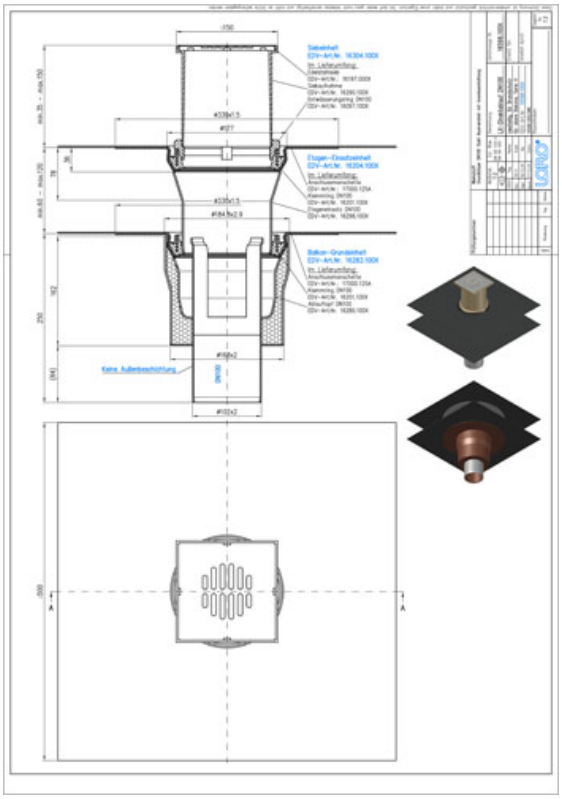

Údaje o artiklu

EAN kód	4038088104811
ETIM třída	EC010284
Jmenovitý průměr	DN 100
Vnější rozměry (VxŠxD)	330 x 330 x 525 mm
Hmotnost	10,00 Kg (STK)
Skupina produktů	4
Celní sazebník	73089098
Materiál / Barva	Stahl feuerverzinkt, Silber

Pokyny k použití

Die Serie H beinhaltet Balkonabläufe mit Anschlussmanschette für die Anbindung an Abdichtungsbahnen. Die Anschlussmanschette besteht aus Bitumen/EPDM Verbund (Standard) oder auf Anfrage aus PVC oder ECB und wird werkseitig vormontiert.

Ke stažení

Alles online

Návod k instalaci (PDF)
Výkres rozměrů (PDF)
Prospekt (PDF)
CAD 2D (DXF)
CAD 3D (DWG)
BIM 3D (STEP)
BIM 3D (IFC)