

LX-BALKONDA ST.FVZ.M.BRANDSCH.2 TLG.

LORO-X direct drain for fire protection, vertical, two-part with sieve for upper balconies series H DN 100

Beskrivelse

LORO-X direct balcony drain, fire protection system, series H, general building authority test certificate no. P-MPA-E-09-010, two-piece, with thermal insulation, vertical outlet, with pre-fitted connecting collar made of bitumen/EPDM composite, according to DIN EN 1253 with raised quality standard, made of steel, hot-dip galvanized, with long-life coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, consisting of drain pot, connecting collar, clamping ring without drainage openings, extension cartridge (for installation height 60 - 120 mm), connecting collar, clamping ring, drainage ring, holding fixture for strainer (for installation height 35 - 155 mm), strainer for upper balconies, DN100

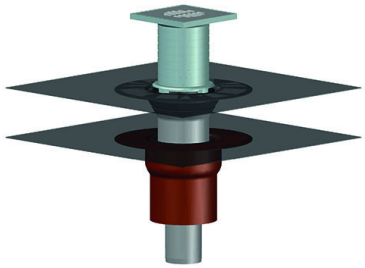

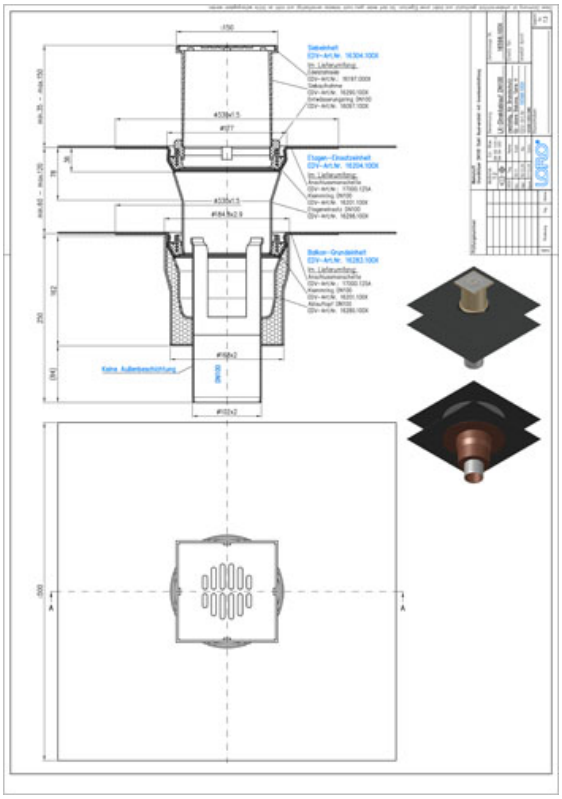

Artikkeldata

EAN-kode	4038088104811
ETIM-klasse	EC010284
Nominell diameter	DN 100
Utvendige mål (HxBxL)	330 x 330 x 525 mm
Vekt	10,00 Kg (STK)
Produktgruppe	4
Tolltariffnummer	73089098
Materiale / Farge	Stahl feuerverzinkt, Silber

Bruksanvisning

Die Serie H beinhaltet Balkonabläufe mit Anschlussmanschette für die Anbindung an Abdichtungsbahnen. Die Anschlussmanschette besteht aus Bitumen/EPDM Verbund (Standard) oder auf Anfrage aus PVC oder ECB und wird werkseitig vormontiert.

Nedlastinger

Alles online

Monteringsanvisning (PDF)
CAD 2D (DXF)
BIM 3D (IFC)
Måltegning (PDF)
CAD 3D (DWG)
Brosjyre (PDF)
BIM 3D (STEP)