
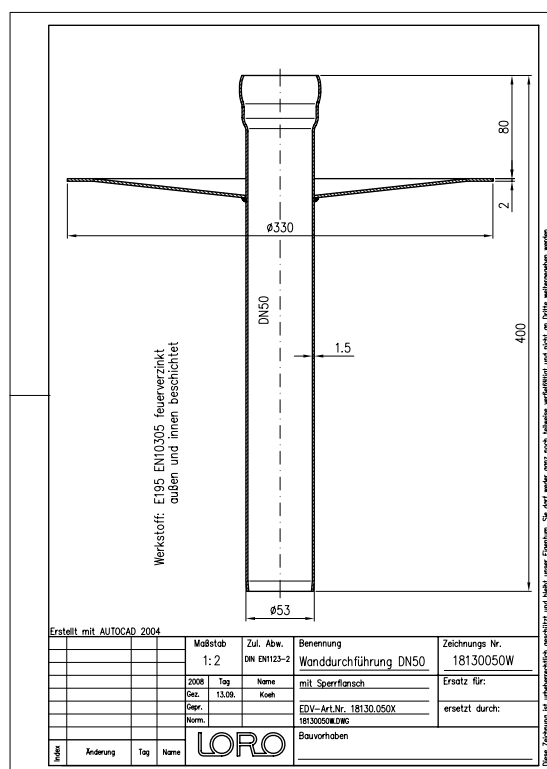


LORO-X ROHR-WAND-U.DECKENDURCHFUEHRUNG, LORO-X PIPE-WALL AND CEILING DUCT DN 50

Description

LORO-X pipe wall and slab penetration with blocking flange, media-carrying, made of steel, hot-dip galvanized, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, length 400 mm, DN50

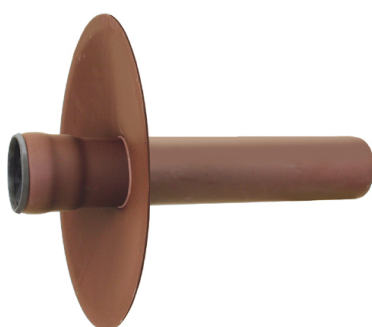

Article information

EAN Code	4038088012574
ETIM Class	EC003024
Nominal diameter	DN 50
Nominal length/degree	400
Outside measurements (HxWxL)	330 x 330 x 400 mm
Weight	2,30 Kg (STK)
Product group	1
Customs tariff number	73089098
Material / Color	Stahl feuerverzinkt, Rotbraun

Usage note

Gemäß DIN EN 12056-3 7.6.2 sind bei Regenwasserleitungen, die durch Außenwände führen, wasserdichte Rohrdurchführungen zu verwenden. Die Rohrdurchführung mit Sperrflansch eignet sich für wasserundurchlässigen (WU) Beton.

Downloads



Alles online

[CAD drawing \(PDF\)](#)
[CAD \(DWG\)](#)
[Brochure \(PDF\)](#)
[CAD 2D \(DXF\)](#)