
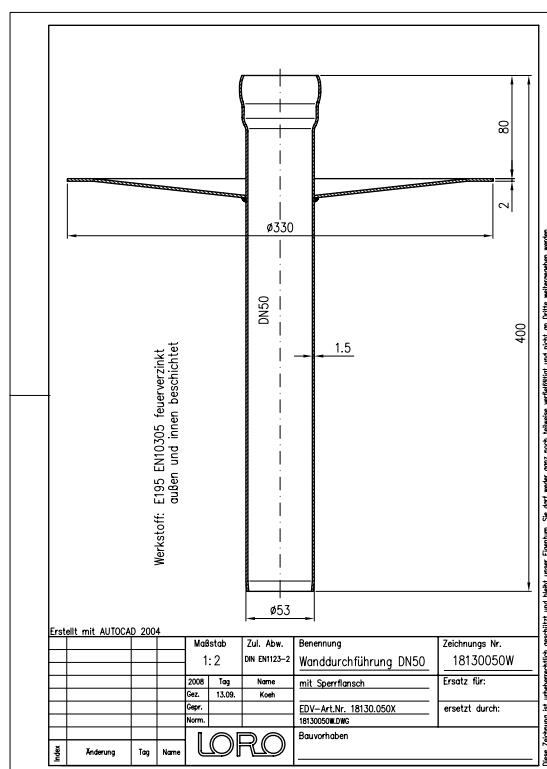


LORO-X ROHR-WAND-U.DECKENDURCHFUEHRUNG, LORO-X PIPE-WALL AND CEILING DUCT DN 50

Descrição

LORO-X pipe wall and slab penetration with blocking flange, media-carrying, made of steel, hot-dip galvanized, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, length 400 mm, DN50

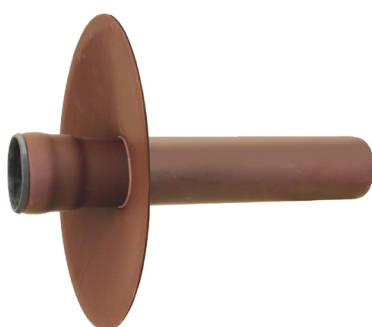

Dados do artigo

Código EAN	4038088012574
Classe ETIM	EC003024
Diâmetro nominal	DN 50
Comprimento/grau nominal	400
Medidas exteriores (AxLxP)	330 x 330 x 400 mm
Peso	2,30 Kg (STK)
Grupo de produtos	1
Número de pauta aduaneira	73089098
Material / Cor	Stahl feuerverzinkt, Rotbraun

Nota de utilização

Gemäß DIN EN 12056-3 7.6.2 sind bei Regenwasserleitungen, die durch Außenwände führen, wasserdichte Rohrdurchführungen zu verwenden. Die Rohrdurchführung mit Sperrflansch eignet sich für wasserundurchlässigen (WU) Beton.

Transferências



Alles online

[Desenho cotado \(PDF\)](#)

[CAD \(DWG\)](#)

[Brochura \(PDF\)](#)

[CAD 2D \(DXF\)](#)