
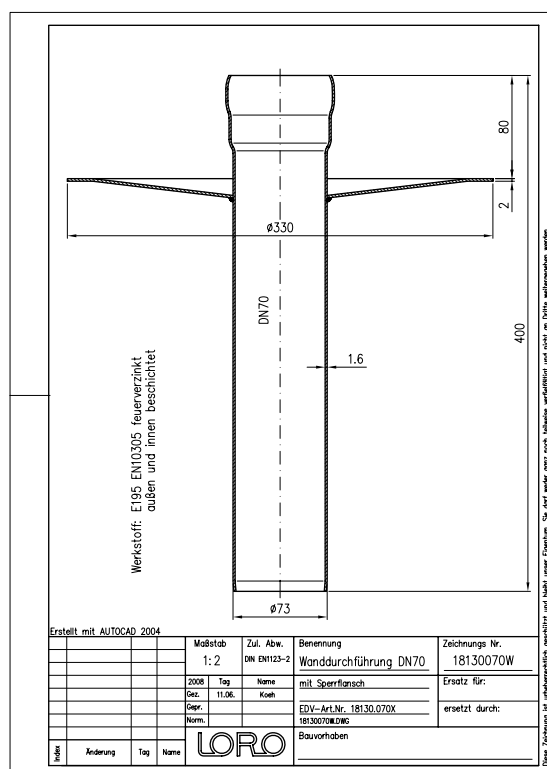


LORO-X ROHR-WAND-U.DECKENDURCHFUEHRUNG,

LORO-X pipe-wall and ceiling penetration DN 70

Opis

LORO-X pipe wall and slab penetration with blocking flange, media-carrying, made of steel, hot-dip galvanized, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, length 400 mm, DN70

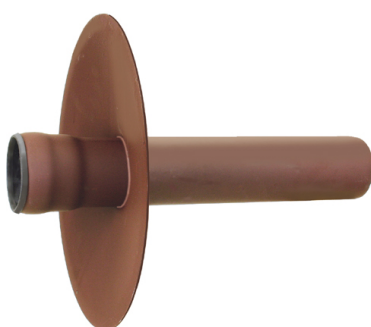

Podaci o artiklu

EAN kod	4038088012581
ETIM klasa	EC003024
Nazivni promjer	DN 70
Nazivna duljina/stupanj	400
Vanjske mjere (VxŠxD)	330 x 330 x 400 mm
Težina	2,60 Kg (STK)
Grupa proizvoda	1
Carinski tarifni broj	73089098
Materijal / Boja	Stahl feuerverzinkt, Rotbraun

Napomena za upotrebu

Gemäß DIN EN 12056-3 7.6.2 sind bei Regenwasserleitungen, die durch Außenwände führen, wasserdichte Rohrdurchführungen zu verwenden. Die Rohrdurchführung mit Sperrflansch eignet sich für wasserundurchlässigen (WU) Beton.

Preuzimanja



Alles online

[Dimenzijski crtež \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Prospekt \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)