
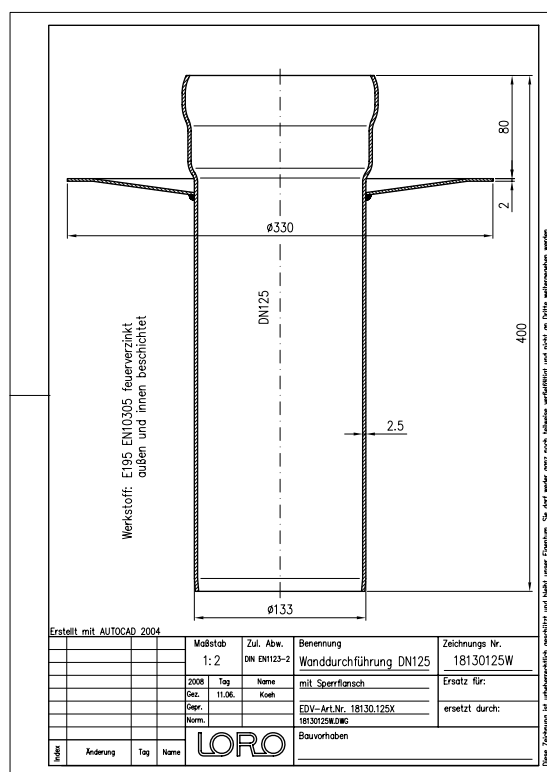


## LORO-X ROHR-WAND-U.DECKENDURCHFUEHRUNG,

LORO-X pipe-wall and ceiling passage DN 125

### Описание

LORO-X pipe wall and slab penetration with blocking flange, media-carrying, made of steel, hot-dip galvanized, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, length 400 mm, DN125

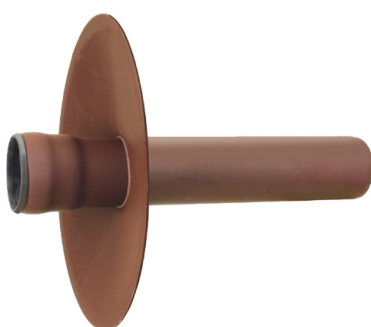

### Данни за артикула

|                          |                               |
|--------------------------|-------------------------------|
| ЕАН код                  | 4038088012611                 |
| ЕТИМ клас                | EC003024                      |
| Номинален диаметър       | DN 125                        |
| Номинална дължина/градус | 400                           |
| Външни размери (ВxШxД)   | 330 x 330 x 400 mm            |
| Тегло                    | 4,80 Kg (STK)                 |
| Продуктова група         | 1                             |
| Митнически тарифен номер | 73089098                      |
| Материал / Цвят          | Stahl feuerverzinkt, Rotbraun |

### Забележка за употреба

Gemäß DIN EN 12056-3 7.6.2 sind bei Regenwasserleitungen, die durch Außenwände führen, wasserdichte Rohrdurchführungen zu verwenden. Die Rohrdurchführung mit Sperrflansch eignet sich für wasserundurchlässigen (WU) Beton.

### Изтегляния



Alles online

[CAD чертеж \(PDF\)](#)

[CAD \(DWG\)](#)

[Брошура \(PDF\)](#)

[CAD 2D \(DXF\)](#)