
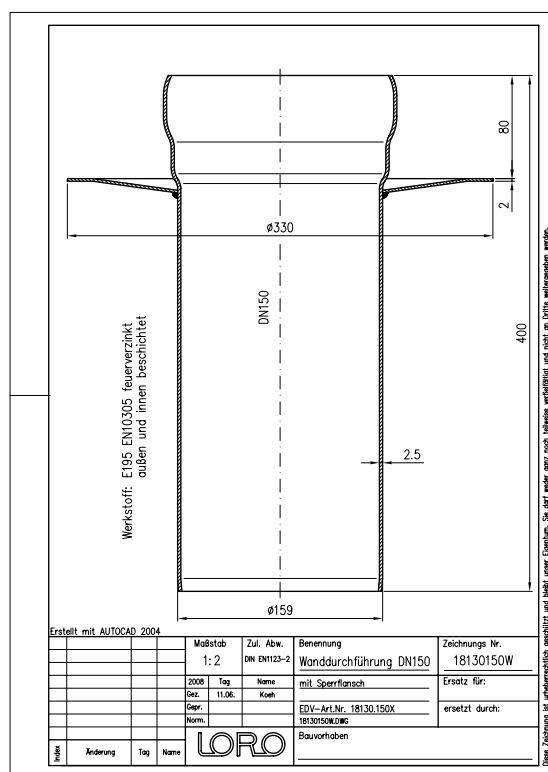


LORO-X ROHR-WAND-U.DECKENDURCHFUEHRUNG,

LORO-X pipe-wall and ceiling penetration DN 150

Descriere

LORO-X pipe wall and slab penetration with blocking flange, media-carrying, made of steel, hot-dip galvanized, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, length 400 mm, DN150

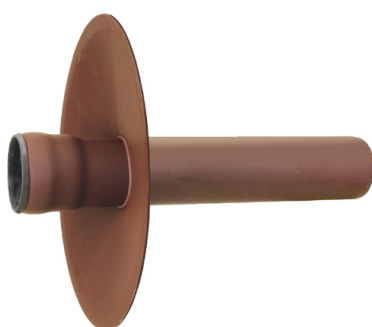

Date articol

Cod EAN	4038088012628
Clasă ETIM	EC003024
Diametru nominal	DN 150
Lungime/grad nominal	400
Dimensiuni exterioare (ÎxLxA)	330 x 330 x 400 mm
Greutate	5,00 Kg (STK)
Grupă de produse	1
Număr tarif vamal	73089098
Material / Culoare	Stahl feuerverzinkt, Rotbraun

Notă de utilizare

Gemäß DIN EN 12056-3 7.6.2 sind bei Regenwasserleitungen, die durch Außenwände führen, wasserdichte Rohrdurchführungen zu verwenden. Die Rohrdurchführung mit Sperrflansch eignet sich für wasserundurchlässigen (WU) Beton.

Descărcări



Alles online

[Desen CAD \(PDF\)](#)

[CAD \(DWG\)](#)

[Broșură \(PDF\)](#)

[CAD 2D \(DXF\)](#)