


LORO-X FLACHDACH-HPT.ENTW.F.WU-BETON,

LORO-X Flat Roof Main Dewatering for WU-Concrete System Cold Roof DN 70

Popis

LORO flat roof drainage for waterproof concrete, gravity flow, consisting of: LORO-X roof penetration with blocking flange, made of steel, hot-dip galvanized, strainer unit, made of aluminium, plastic-coated, 1 x sealing, DN70

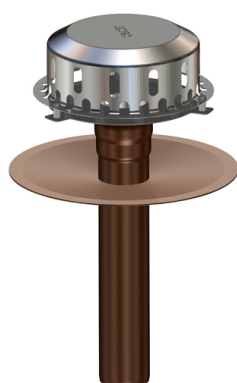


Údaje o artikli

EAN kód	4038088091265
ETIM trieda	EC011350
Menovitý priemer	DN 70
Vonkajšie rozmery (VxŠxH)	330 x 330 x 516 mm
Hmotnosť	3,50 Kg (STK)
Skupina produktov	9
Colný sadzobník	73089098

Pokyny na použitie

kein Verwendungshinweis notwendig

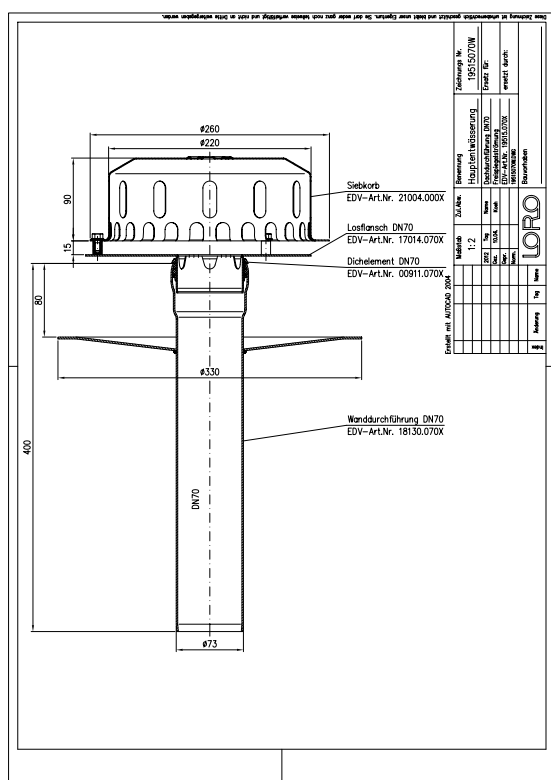

Na stiahnutie



Alles online

[Rozmerový výkres \(PDF\)](#)

[CAD \(DWG\)](#)

[Prospekt \(PDF\)](#)

[CAD 2D \(DXF\)](#)