

LX-AUFSATZELEMENT M.AUFGEK.KLEBEFL.

LORO-X surface-mounted element with upturned adhesive flange 270 mm long Series V-AK DN 50

Descriere

LORO-X balcony extension unit for two piece version, series V-AK, with upstanced bonding flange for sealing from liquid plastic at wall areas, according to DIN EN 1253 with raised quality standard, made of stainless steel, consisting of: extension body with upstanced bonding flange and sealing element DN70, made of stainless steel, DN50




Date articol

Cod EAN	4038088108949
Clasă ETIM	EC011398
Diametru nominal	DN 50
Dimensiuni exterioare (ÎxLxA)	366 x 218 x 245 mm
Greutate	2,00 Kg (STK)
Grupă de produse	4
Număr tarif vamal	73072980
Material / Culoare	Edelstahl, Silber

Notă de utilizare

LORO-Balkonablauf mit Aufsatzelemente, Serie V-AK für Balkonabdichtung aus Flüssigkunststoffen im Wandbereich. Zweiteilige Ausführung für wärmegeämmte Balkone, mit aufgekanteten Klebeflansch für Einbau in Wand-oder Eckbereichen.

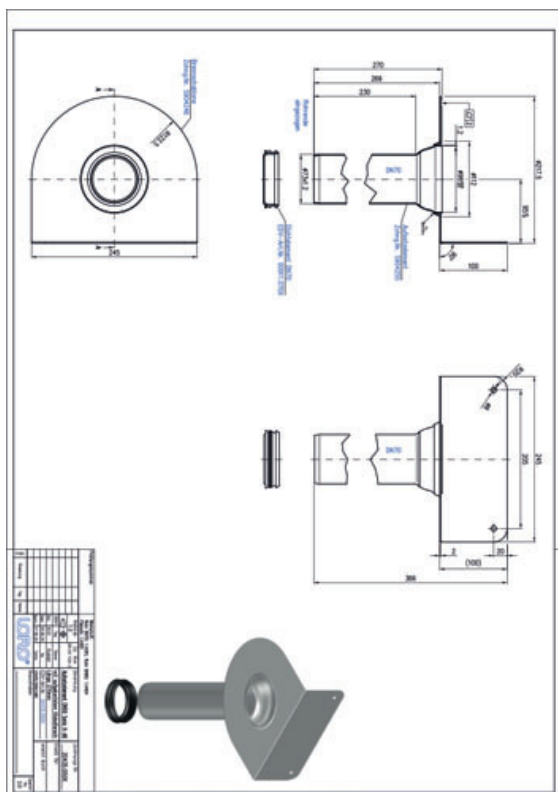

Descărcări



Alles online

[Instrucțiuni de montaj \(PDF\)](#)

[Certificat \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Desen CAD \(PDF\)](#)

[Aufbauschema \(PDF\)](#)

[Broșură \(PDF\)](#)

[CAD 2D \(DXF\)](#)