


LX-AUFSATZELEMENT M.AUFGEK.KLEBEFL.

LORO-X surface-mounted element with upturned adhesive flange 270 mm long Series V-AK DN 50

Opis

LORO-X balcony extension unit for two piece version, series V-AK, with upstanced bonding flange for sealing from liquid plastic at wall areas, according to DIN EN 1253 with raised quality standard, made of stainless steel, consisting of: extension body with upstanced bonding flange and sealing element DN70, made of stainless steel, DN50

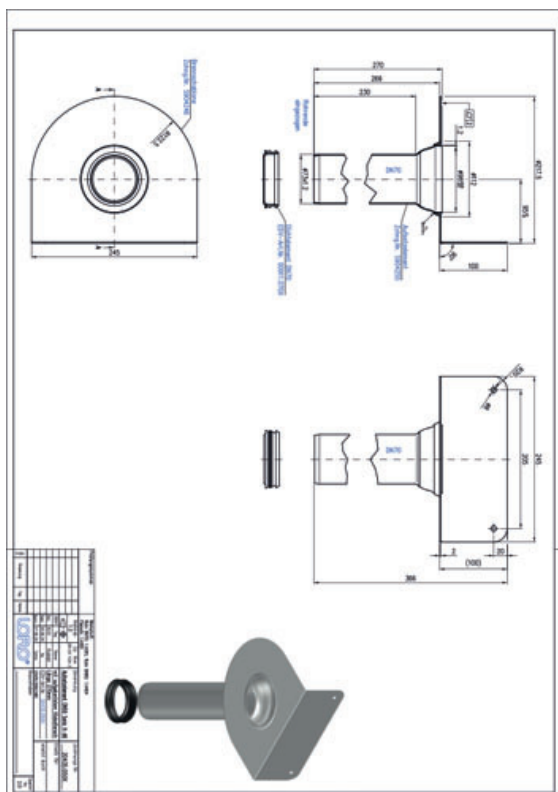

Podaci o artiklu

EAN kod	4038088108949
ETIM klasa	EC011398
Nazivni promjer	DN 50
Vanjske mjere (VxŠxD)	366 x 218 x 245 mm
Težina	2,00 Kg (STK)
Grupa proizvoda	4
Carinski tarifni broj	73072980
Materijal / Boja	Edelstahl, Silber

Napomena za upotrebu

LORO-Balkonablauf mit Aufsatzelemente, Serie V-AK für Balkonabdichtung aus Flüssigkunststoffen im Wandbereich. Zweiteilige Ausführung für wärmegeämmte Balkone, mit aufgekanteten Klebeflansch für Einbau in Wand-oder Eckbereichen.

Preuzimanja



Alles online

[Upute za ugradnju \(PDF\)](#)

[Certifikat \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Dimenzijski crtež \(PDF\)](#)

[Aufbauschema \(PDF\)](#)

[Prospekt \(PDF\)](#)

[CAD 2D \(DXF\)](#)