
LX-AUFSATZELEMENT M.AUFGEK.KLEBEFL.

LORO-X surface-mounted element with upturned adhesive flange 270 mm long Series V-AK DN 50

Beskrivelse

LORO-X balcony extension unit for two piece version, series V-AK, with upstanded bonding flange for sealing from liquid plastic at wall areas, according to DIN EN 1253 with raised quality standard, made of stainless steel, consisting of: extension body with upstanded bonding flange and sealing element DN70, made of stainless steel, DN50



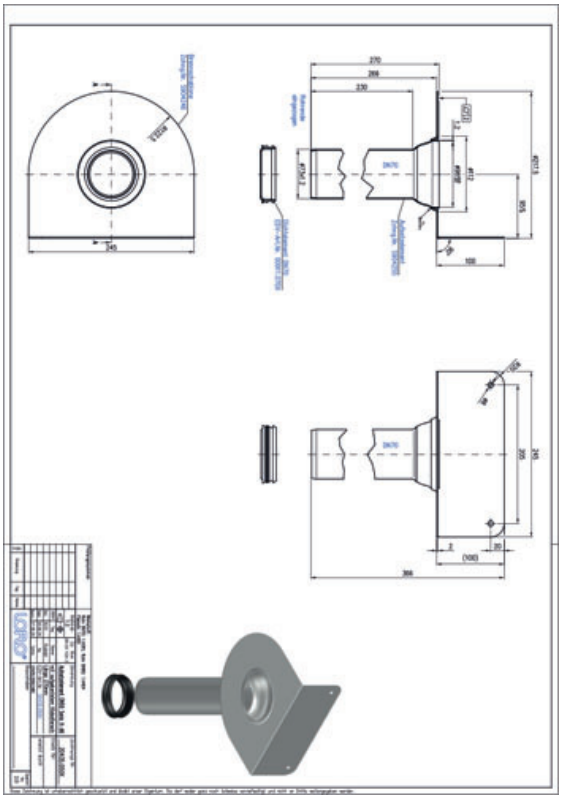

Artikkeldata

EAN-kode	4038088108949
ETIM-klasse	EC011398
Nominell diameter	DN 50
Utvendige mål (HxBxL)	366 x 218 x 245 mm
Vekt	2,00 Kg (STK)
Produktgruppe	4
Tolltariffnummer	73072980
Materiale / Farge	Edelstahl, Silber

Bruksanvisning

LORO-Balkonablauf mit Aufsatzelemente, Serie V-AK für Balkonabdichtung aus Flüssigkunststoffen im Wandbereich. Zweiteilige Ausführung für wärmegedämmte Balkone, mit aufgekanteten Klebeflansch für Einbau in Wand-oder Eckbereichen.

Nedlastinger

Alles online

Monteringsanvisning (PDF)
Godkjenning (PDF)
CAD 3D (DWG)
Måltegning (PDF)
Aufbauschema (PDF)
Brosjyre (PDF)
CAD 2D (DXF)