

LX-AUFSATZELEMENT M.AUFGEK.KLEBEFL.

LORO-X surface-mounted element with upturned adhesive flange 270 mm long Series V-AK DN 70

Description

LORO-X balcony extension unit for two piece version, series V-AK, with upstanced bonding flange for sealing from liquid plastic at wall areas, according to DIN EN 1253 with raised quality standard, made of stainless steel, consisting of: extension body with upstanced bonding flange and sealing element DN100, made of stainless steel, DN70




Article information

EAN Code	4038088102510
ETIM Class	EC011398
Nominal diameter	DN 70
Outside measurements (HxWxL)	245 x 218 x 366 mm
Weight	2,10 Kg (STK)
Product group	4
Customs tariff number	73072980
Material / Color	Edelstahl, Silber

Usage note

LORO-Balkonablauf mit Aufsatzelemente, Serie V-AK für Balkonabdichtung aus Flüssigkunststoffen im Wandbereich. Zweiteilige Ausführung für wärmegeämmte Balkone, mit aufgekanteten Klebeflansch für Einbau in Wand-oder Eckbereichen.

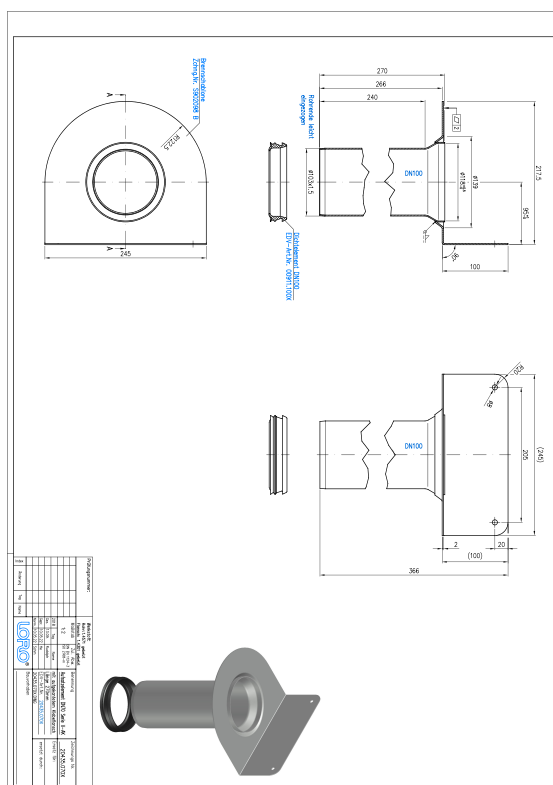

Downloads



Alles online

[Installation \(PDF\)](#)
[Certificate \(PDF\)](#)
[System data sheet LX 1226](#)
[CAD 2D \(DXF\)](#)
[BIM 3D \(IFC\)](#)

[CAD drawing \(PDF\)](#)
[Aufbauschema \(PDF\)](#)
[System data sheet LX 1227](#)
[CAD 3D \(DWG\)](#)

[Brochure \(PDF\)](#)
[System data sheet LX 1225](#)
[System data sheet LX 1228](#)
[BIM 3D \(STEP\)](#)