

LX-AUFSATZELEMENT M.AUFGEK.KLEBEFL.

LORO-X surface-mounted element with upturned adhesive flange 270 mm long Series V-AK DN 70

Descriere

LORO-X balcony extension unit for two piece version, series V-AK, with upstanding bonding flange for sealing from liquid plastic at wall areas, according to DIN EN 1253 with raised quality standard, made of stainless steel, consisting of: extension body with upstanding bonding flange and sealing element DN100, made of stainless steel, DN70




Date articol

Cod EAN	4038088102510
Clasă ETIM	EC011398
Diametru nominal	DN 70
Dimensiuni exterioare (ÎxLxA)	245 x 218 x 366 mm
Greutate	2,10 Kg (STK)
Grupă de produse	4
Număr tarif vamal	73072980
Material / Culoare	Edelstahl, Silber

Notă de utilizare

LORO-Balkonablauf mit Aufsatzelemente, Serie V-AK für Balkonabdichtung aus Flüssigkunststoffen im Wandbereich. Zweiteilige Ausführung für wärmedämmte Balkone, mit aufgekanteten Klebeflansch für Einbau in Wand- oder Eckbereichen.

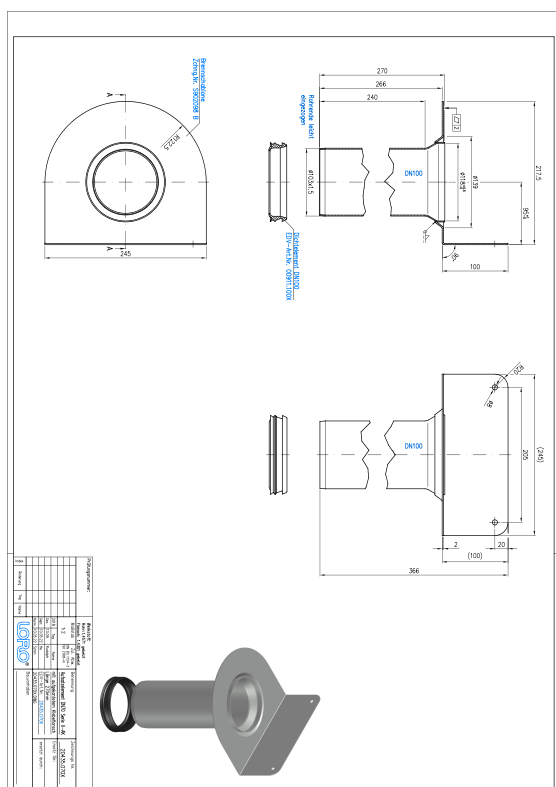

Descărcări



Alles online

[Instrucțiuni de montaj \(PDF\)](#)
[Certificat \(PDF\)](#)
[Fișă tehnică de sistem LX 1226](#)
[CAD 2D \(DXF\)](#)
[BIM 3D \(IFC\)](#)

[Desen CAD \(PDF\)](#)
[Aufbauschema \(PDF\)](#)
[Fișă tehnică de sistem LX 1227](#)
[CAD 3D \(DWG\)](#)

[Broșură \(PDF\)](#)
[Fișă tehnică de sistem LX 1225](#)
[Fișă tehnică de sistem LX 1228](#)
[BIM 3D \(STEP\)](#)