

LX-AUFSATZELEMENT M.AUFGEK.KLEBEFL.

LORO-X surface-mounted element with upturned adhesive flange 270 mm long Series V-AK DN 70

Opis

LORO-X balcony extension unit for two piece version, series V-AK, with upstanced bonding flange for sealing from liquid plastic at wall areas, according to DIN EN 1253 with raised quality standard, made of stainless steel, consisting of: extension body with upstanced bonding flange and sealing element DN100, made of stainless steel, DN70




Podaci o artiklu

EAN kod	4038088102510
ETIM klasa	EC011398
Nazivni promjer	DN 70
Vanjske mjere (VxŠxD)	245 x 218 x 366 mm
Težina	2,10 Kg (STK)
Grupa proizvoda	4
Carinski tarifni broj	73072980
Materijal / Boja	Edelstahl, Silber

Napomena za upotrebu

LORO-Balkonablauf mit Aufsatzelemente, Serie V-AK für Balkonabdichtung aus Flüssigkunststoffen im Wandbereich. Zweiteilige Ausführung für wärmegeämmte Balkone, mit aufgekanteten Klebeflansch für Einbau in Wand-oder Eckbereichen.

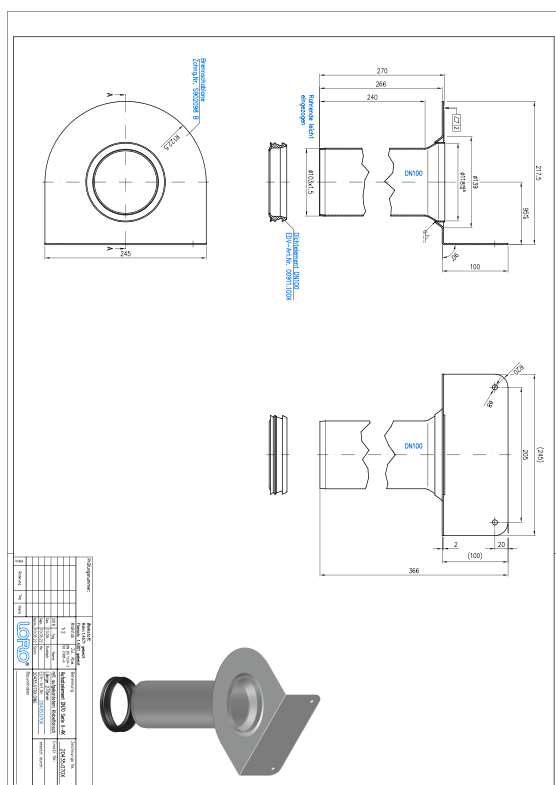

Preuzimanja



Alles online

[Upute za ugradnju \(PDF\)](#)
[Certifikat \(PDF\)](#)
[Tehnički list sustava LX 1226](#)
[CAD 2D \(DXF\)](#)
[BIM 3D \(IFC\)](#)

[Dimenzijski crtež \(PDF\)](#)
[Aufbauschema \(PDF\)](#)
[Tehnički list sustava LX 1227](#)
[CAD 3D \(DWG\)](#)

[Prospekt \(PDF\)](#)
[Tehnički list sustava LX 1225](#)
[Tehnički list sustava LX 1228](#)
[BIM 3D \(STEP\)](#)