

LX-AUFSATZELEMENT M.AUFGEK.KLEBEFL.

LORO-X surface-mounted element with upturned adhesive flange 270 mm long Series V-AK DN 70

Descrizione

LORO-X balcony extension unit for two piece version, series V-AK, with upstanced bonding flange for sealing from liquid plastic at wall areas, according to DIN EN 1253 with raised quality standard, made of stainless steel, consisting of: extension body with upstanced bonding flange and sealing element DN100, made of stainless steel, DN70




Dati articolo

Codice EAN	4038088102510
Classe ETIM	EC011398
Diametro nominale	DN 70
Misure esterne (AxLxP)	245 x 218 x 366 mm
Peso	2,10 Kg (STK)
Gruppo prodotti	4
Numero tariffa doganale	73072980
Materiale / Colore	Edelstahl, Silber

Note d'uso

LORO-Balkonablauf mit Aufsatzelemente, Serie V-AK für Balkonabdichtung aus Flüssigkunststoffen im Wandbereich. Zweiteilige Ausführung für wärmegeämmte Balkone, mit aufgekanteten Klebeflansch für Einbau in Wand-oder Eckbereichen.

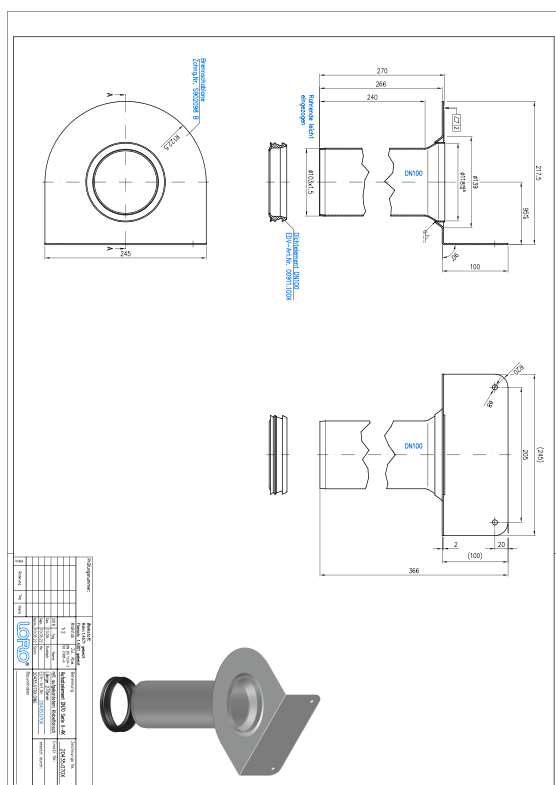

Download



Alles online

[Istruzioni di installazione \(PDF\)](#)

[Certificato \(PDF\)](#)

[Scheda tecnica del sistema LX 1226](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Disegno dimensionale \(PDF\)](#)

[Aufbauschema \(PDF\)](#)

[Scheda tecnica del sistema LX 1227](#)

[CAD 3D \(DWG\)](#)

[Brochure \(PDF\)](#)

[Scheda tecnica del sistema LX 1225](#)

[Scheda tecnica del sistema LX 1228](#)

[BIM 3D \(STEP\)](#)