

LX-AUFSATZELEMENT M.AUFGEK.KLEBEFL.

LORO-X surface-mounted element with upturned adhesive flange 270 mm long Series V-AK DN 70

Beskrivelse

LORO-X balcony extension unit for two piece version, series V-AK, with upstanded bonding flange for sealing from liquid plastic at wall areas, according to DIN EN 1253 with raised quality standard, made of stainless steel, consisting of: extension body with upstanded bonding flange and sealing element DN100, made of stainless steel, DN70




Artikkeldata

EAN-kode	4038088102510
ETIM-klasse	EC011398
Nominell diameter	DN 70
Utvendige mål (HxBxL)	245 x 218 x 366 mm
Vekt	2,10 Kg (STK)
Produktgruppe	4
Tolltariffnummer	73072980
Materiale / Farge	Edelstahl, Silber

Bruksanvisning

LORO-Balkonablauf mit Aufsatzelemente, Serie V-AK für Balkonabdichtung aus Flüssigkunststoffen im Wandbereich. Zweiteilige Ausführung für wärmedämmte Balkone, mit aufgekanteten Klebeflansch für Einbau in Wand-oder Eckbereichen.

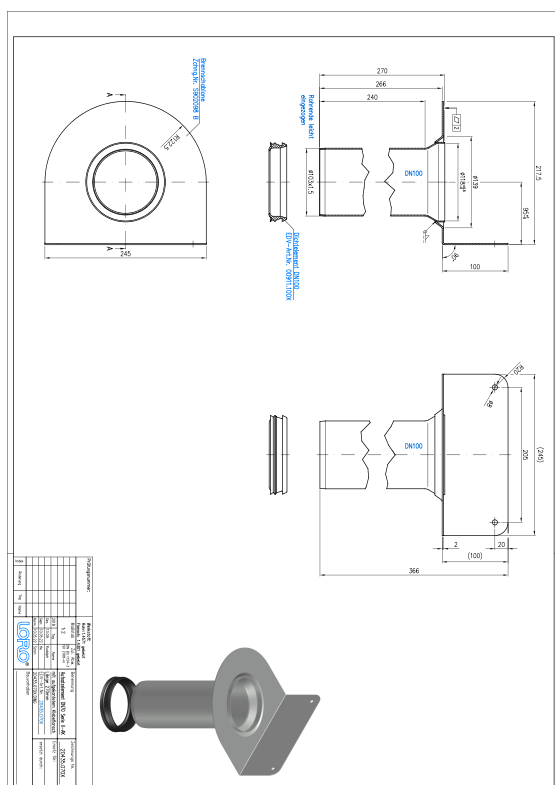

Nedlastinger



Alles online

[Monteringsanvisning \(PDF\)](#)

[Godkjenning \(PDF\)](#)

Systemdatablad LX 1226

CAD 2D (DXF)

BIM 3D (IFC)

[Måltegning \(PDF\)](#)

[Aufbauschema \(PDF\)](#)

Systemdatablad LX 1227

CAD 3D (DWG)

[Brosjyre \(PDF\)](#)

Systemdatablad LX 1225

Systemdatablad LX 1228

BIM 3D (STEP)