LX-AUFSATZELEMENT M.AUFGEK.KLEBEFL.

LORO-X surface-mounted element with upturned adhesive flange 270 mm long Series V-AK DN 100

Beskrivelse

LORO-X balcony extension unit for two piece version, series V-AK, with upstanded bonding flange for sealing from liquid plastic at wall areas, according to DIN EN 1253 with raised quality standard, made of stainless steel, consisting of: extension body with upstanded bonding flange and sealing element DN100, made of stainless steel, DN100

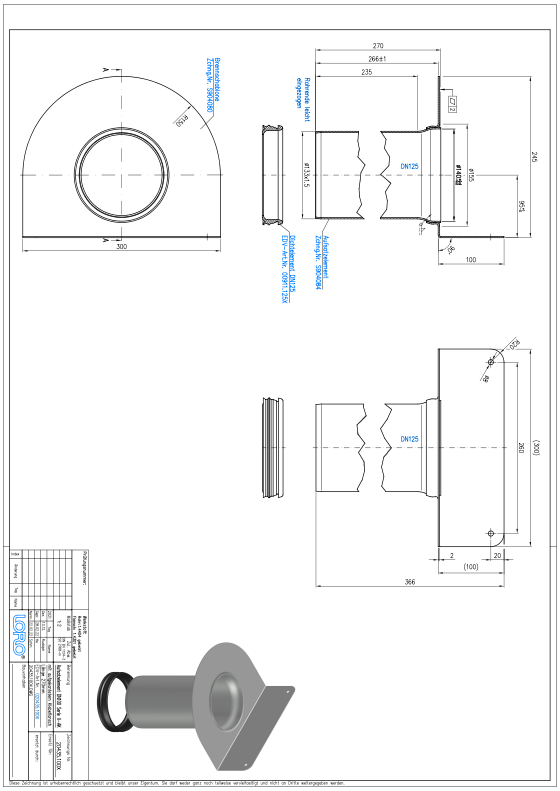

Artikkeldata

EAN-kode	4038088106181
ETIM-klasse	EC011398
Nominell diameter	DN 100
Utvendige mål (HxBxL)	300 x 245 x 366 mm
Vekt	2,80 Kg (STK)
Produktgruppe	4
Tolltariffnummer	73072980
Materiale / Farge	Edelstahl, Silber

Bruksanvisning

LORO-Balkonablauf mit Aufsatzelemente, Serie V-AK für Balkonabdichtung aus Flüssigkunststoffen im Wandbereich. Zweiteilige Ausführung für wärmegedämmte Balkone, mit aufgekanteten Klebeflansch für Einbau in Wand-oder Eckbereichen.

Nedlastinger

Alles online

- Monteringsanvisning (PDF)
- Godkjenning (PDF)
- CAD 3D (DWG)
- Måltegning (PDF)
- Aufbauschema (PDF)
- BIM 3D (STEP)
- Brosjyre (PDF)
- CAD 2D (DXF)
- BIM 3D (IFC)