

LX-AUFSATZELEMENT M.ECKFL. SR.V-AK DN50

LORO-X Surface-mounted element with corner flange 70 mm long Series V-AK DN 50

Popis

LORO-X balcony set up element for one piece version, series V-AK, with upstand bonding flange for sealing from liquid plastic at wall corner areas, according to DIN EN 1253 with raised quality standard, made of stainless steel, consisting of: set up element with upstanded bonding cornerflange and sealing element DN70, made of stainless steel, DN50




Údaje o artikli

EAN kód	4038088108956
ETIM trieda	EC011398
Menovitý priemer	DN 50
Vonkajšie rozmery (VxŠxH)	166 x 218 x 218 mm
Hmotnosť	1,70 Kg (STK)
Skupina produktov	4
Colný sadzobník	73072980
Materiál / Farba	Edelstahl, Silber

Pokyny na použitie

LORO-Balkonablauf mit Aufsatzelemente, Serie V-AK für Balkonabdichtung aus Flüssigkunststoffen im Wandbereich.

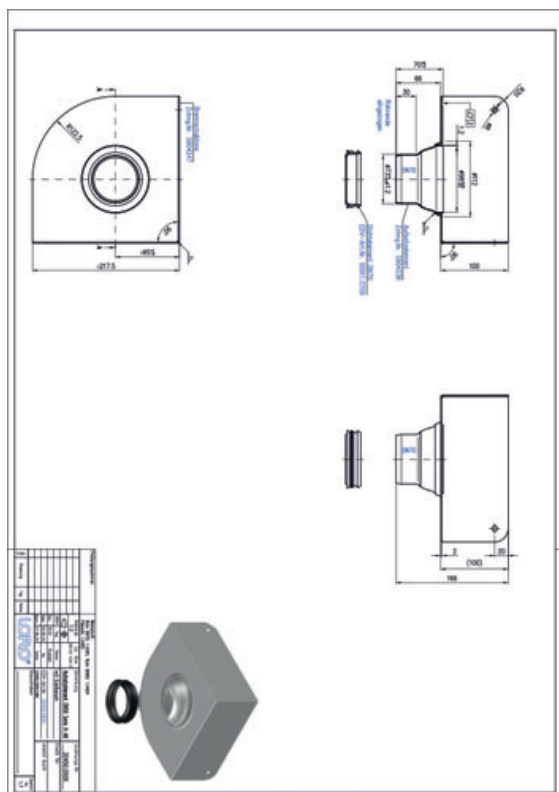

Na stiahnutie



Alles online

[Návod na montáž \(PDF\)](#)

[Certifikát \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Rozmerový výkres \(PDF\)](#)

[Aufbauschema \(PDF\)](#)

[Prospekt \(PDF\)](#)

[CAD 2D \(DXF\)](#)