


LX-AUFSATZELEMENT M.ECKFL. SR.V-AK DN50

LORO-X Surface-mounted element with corner flange 70 mm long Series V-AK DN 50

Beschrijving

LORO-X balcony set up element for one piece version, series V-AK, with upstand bonding flange for sealing from liquid plastic at wall corner areas, according to DIN EN 1253 with raised quality standard, made of stainless steel, consisting of: set up element with upstanded bonding cornerflange and sealing element DN70, made of stainless steel, DN50

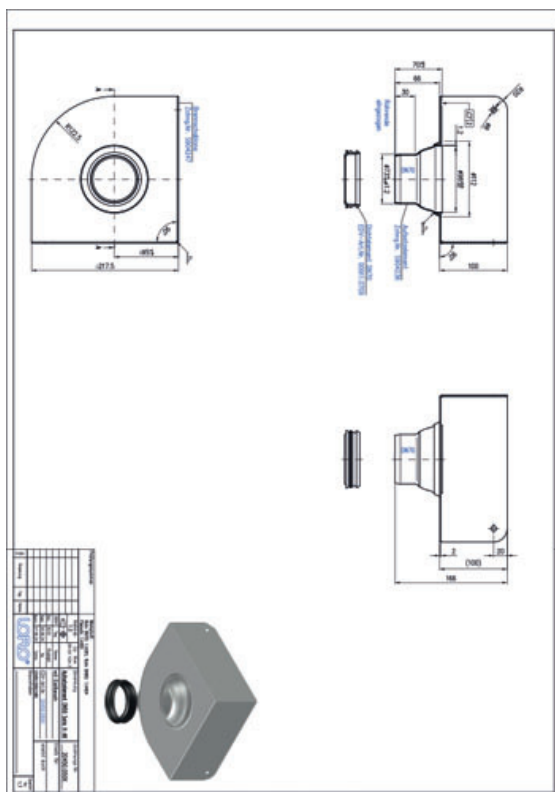

Artikelgegevens

EAN-code	4038088108956
ETIM Klasse	EC011398
Nominale diameter	DN 50
Buitenafmetingen (HxBxL)	166 x 218 x 218 mm
Gewicht	1,70 Kg (STK)
Productgroep	4
Douanetariefnumme r	73072980
Materiaal / Kleur	Edelstahl, Silber

Gebruiksaanwijzing

LORO-Balkonablauf mit Aufsatzelemente, Serie V-AK für Balkonabdichtung aus Flüssigkunststoffen im Wandbereich.

Downloads



Alles online

[Installatiehandleiding \(PDF\)](#)

[Certificaat \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Maattekening \(PDF\)](#)

[Aufbauschema \(PDF\)](#)

[Brochure \(PDF\)](#)

[CAD 2D \(DXF\)](#)