


LX-AUFSATZELEMENT M.ECKFL. SR.V-AK DN50

LORO-X Surface-mounted element with corner flange 70 mm long Series V-AK DN 50

Description

LORO-X balcony set up element for one piece version, series V-AK, with upstand bonding flange for sealing from liquid plastic at wall corner areas, according to DIN EN 1253 with raised quality standard, made of stainless steel, consisting of: set up element with upstanded bonding cornerflange and sealing element DN70, made of stainless steel, DN50

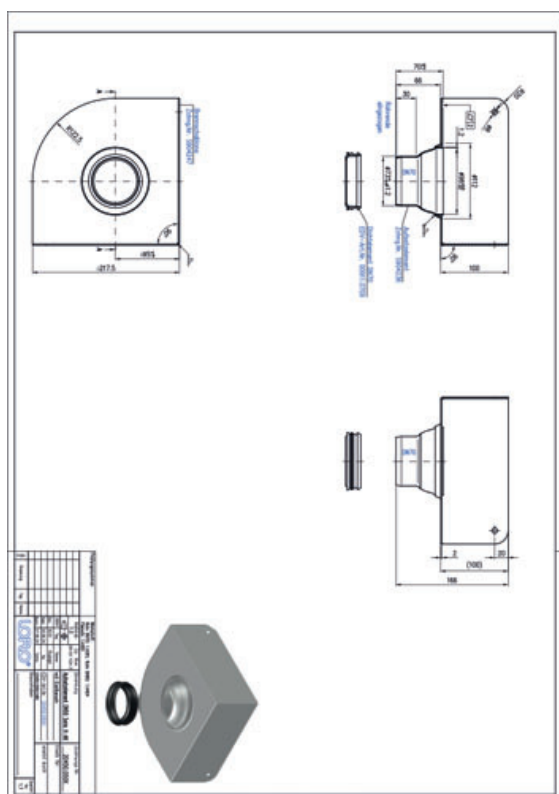

Données de l'article

Code EAN	4038088108956
Classe ETIM	EC011398
Diamètre nominal	DN 50
Dimensions extérieures (HxLxP)	166 x 218 x 218 mm
Poids	1,70 Kg (STK)
Groupe de produits	4
Numéro tarifaire douanier	73072980
Matériau / Couleur	Edelstahl, Silber

Note d'utilisation

LORO-Balkonablauf mit Aufsatzelemente, Serie V-AK für Balkonabdichtung aus Flüssigkunststoffen im Wandbereich.

Téléchargements



Alles online

[Notice d'installation \(PDF\)](#)

[Certificat \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Dessin dimensionnel \(PDF\)](#)

[Aufbauschema \(PDF\)](#)

[Brochure \(PDF\)](#)

[CAD 2D \(DXF\)](#)