


LX-AUFSATZELEMENT SR.V-AK,KLEBEFL.300 MM

LORO-X add-on element with edged adhesive flange variable 300 mm spigot 270 mm DN 50

Description

LORO-X balcony extension unit for two piece version, series V-AK, with upstanded bonding flange for sealing from liquid plastic at wall area, according to DIN EN 1253 with raised quality standard, made of stainless steel, consisting of: extension body with bonding flange with upstand 300 and sealing element DN70, made of stainless steel, DN50

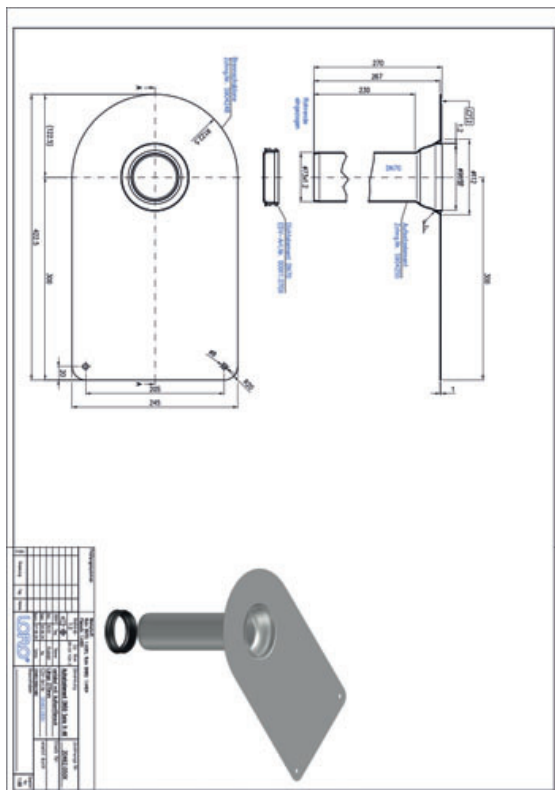

Article information

EAN Code	4038088108987
ETIM Class	EC011398
Nominal diameter	DN 50
Outside measurements (HxWxL)	270 x 423 x 245 mm
Weight	1,70 Kg (STK)
Product group	4
Customs tariff number	73072980
Material / Color	Edelstahl, Silber

Usage note

LORO-Balkonablauf mit Aufsatzelemente, Serie V-AK für Balkonabdichtung aus Flüssigkunststoffen im Wandbereich. Zweiteilige Ausführung für wärmegedämmte Balkone, mit aufgekanteten Klebeflansch für Einbau in Wand- oder Eckbereichen.

Downloads



Alles online

[Installation \(PDF\)](#)

[Certificate \(PDF\)](#)

CAD 3D (DWG)

[CAD drawing \(PDF\)](#)

[Aufbauschema \(PDF\)](#)

[Brochure \(PDF\)](#)

CAD 2D (DXF)