


LX-AUFSATZELEMENT SR.V-AK,KLEBEFL.300 MM

LORO-X add-on element with edged adhesive flange variable 300 mm spigot 270 mm DN 70

Description

LORO-X balcony extension unit for two piece version, series V-AK, with upstanded bonding flange for sealing from liquid plastic at wall area, according to DIN EN 1253 with raised quality standard, made of stainless steel, consisting of: extension body with bonding flange with upstand 300 and sealing element DN100, made of stainless steel, DN70

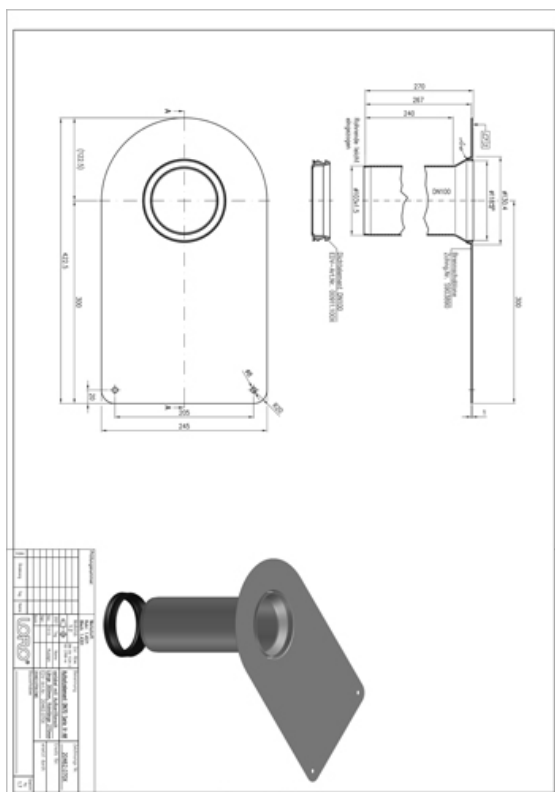

Article information

EAN Code	4038088106785
ETIM Class	EC011398
Nominal diameter	DN 70
Outside measurements (HxWxL)	245 x 423 x 270 mm
Weight	1,70 Kg (STK)
Product group	4
Customs tariff number	73072980
Material / Color	Edelstahl, Silber

Usage note

LORO-Balkonablauf mit Aufsatzelemente, Serie V-AK für Balkonabdichtung aus Flüssigkunststoffen im Wandbereich. Zweiteilige Ausführung für wärmedämmte Balkone, mit aufgekanteten Klebeflansch für Einbau in Wand-oder Eckbereichen.

Downloads



Alles online

[Installation \(PDF\)](#)

[Certificate \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[CAD drawing \(PDF\)](#)

[Aufbauschema \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Brochure \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)