


LX-AUFSATZELEMENT SR.V-AK,KLEBEFL.300 MM

LORO-X surface-mounted element with edged adhesive flange variable 300 mm spigot 270 mm DN 100

Описание

LORO-X balcony extension unit for two piece version, series V-AK, with upstanded bonding flange for sealing from liquid plastic at wall area, according to DIN EN 1253 with raised quality standard, made of stainless steel, consisting of: extension body with bonding flange with upstand 300 and sealing element DN125, made of stainless steel, DN100

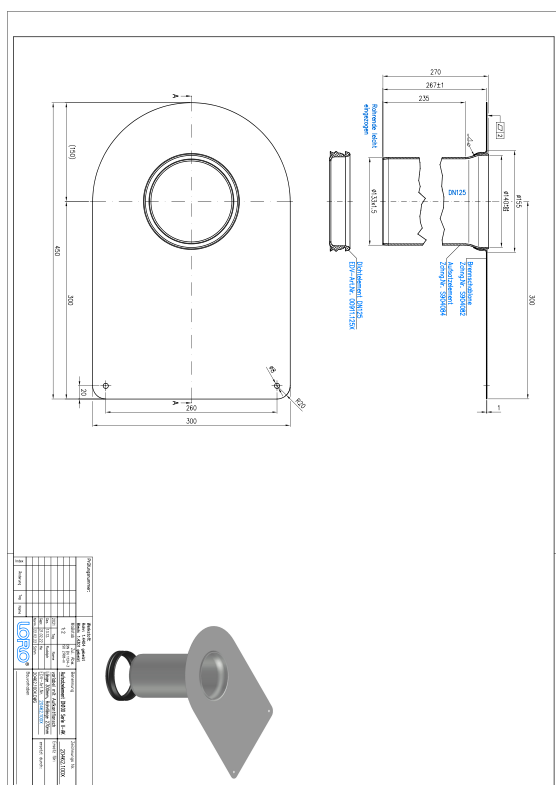

Данни за артикула

ЕАН код	4038088106280
ЕТИМ клас	EC011398
Номинален диаметър	DN 100
Външни размери (ВxШxД)	300 x 450 x 270 mm
Тегло	2,30 Kg (STK)
Продуктова група	4
Митнически тарифен номер	73072980
Материал / Цвят	Edelstahl, Silber

Забележка за употреба

LORO-Balkonablauf mit Aufsatzelemente, Serie V-AK für Balkonabdichtung aus Flüssigkunststoffen im Wandbereich. Zweiteilige Ausführung für wärmegeämmte Balkone, mit aufgekanteten Klebeflansch für Einbau in Wand-oder Eckbereichen.

Изтегляния



Alles online

[Инструкция за монтаж \(PDF\)](#)

[Сертификат \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[CAD чертеж \(PDF\)](#)

[Aufbauschema \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Брошура \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)