


LX-AUFSATZELEMENT SR.V-AK,KLEBEFL.300 MM

LORO-X surface-mounted element with edged adhesive flange variable 300 mm spigot 270 mm DN 100

Descrição

LORO-X balcony extension unit for two piece version, series V-AK, with upstanded bonding flange for sealing from liquid plastic at wall area, according to DIN EN 1253 with raised quality standard, made of stainless steel, consisting of: extension body with bonding flange with upstand 300 and sealing element DN125, made of stainless steel, DN100

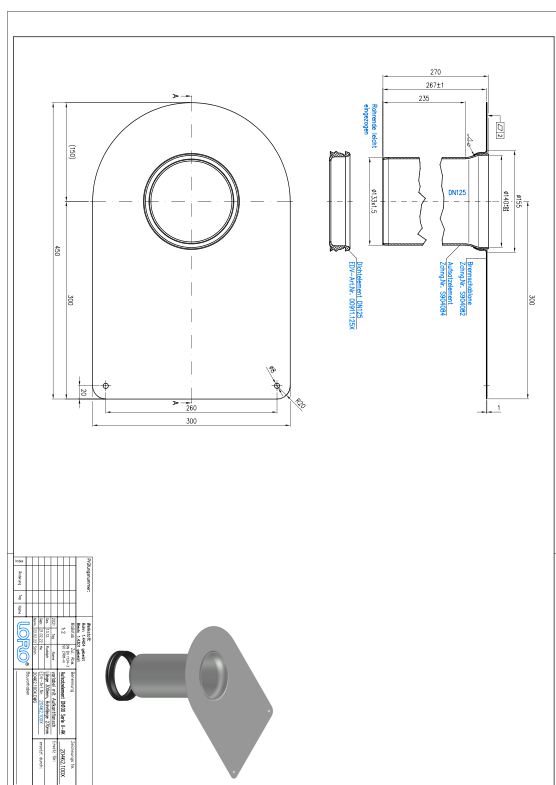

Dados do artigo

Código EAN	4038088106280
Classe ETIM	EC011398
Diâmetro nominal	DN 100
Medidas exteriores (AxLxP)	300 x 450 x 270 mm
Peso	2,30 Kg (STK)
Grupo de produtos	4
Número de pauta aduaneira	73072980
Material / Cor	Edelstahl, Silber

Nota de utilização

LORO-Balkonablauf mit Aufsatzelemente, Serie V-AK für Balkonabdichtung aus Flüssigkunststoffen im Wandbereich. Zweiteilige Ausführung für wärmegeämmte Balkone, mit aufgekanteten Klebeflansch für Einbau in Wand-oder Eckbereichen.

Transferências



Alles online

[Instruções de instalação \(PDF\)](#)

[Homologação \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Desenho cotado \(PDF\)](#)

[Aufbauschema \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Brochura \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)