


LX-AUFSATZELEMENT SR.V-AK,KLEBEFL.300 MM

LORO-X surface-mounted element with edged adhesive flange variable 300 mm spigot 270 mm DN 100

Descrizione

LORO-X balcony extension unit for two piece version, series V-AK, with upstanded bonding flange for sealing from liquid plastic at wall area, according to DIN EN 1253 with raised quality standard, made of stainless steel, consisting of: extension body with bonding flange with upstand 300 and sealing element DN125, made of stainless steel, DN100

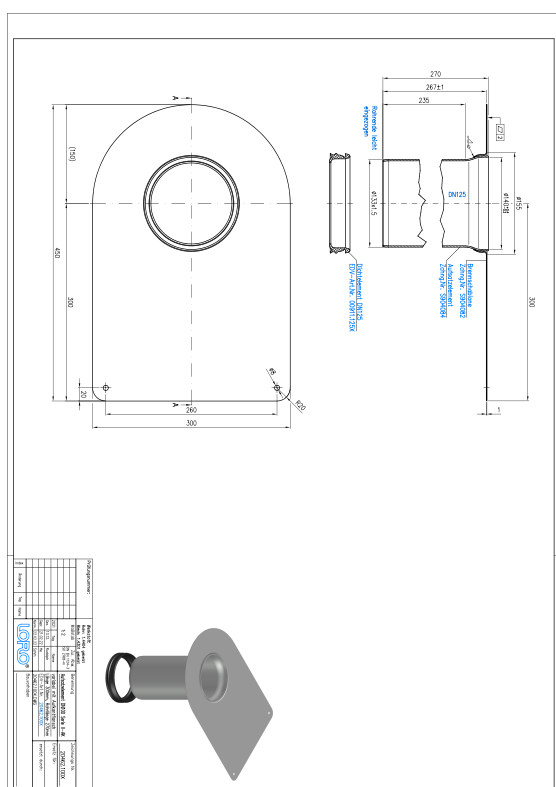

Dati articolo

Codice EAN	4038088106280
Classe ETIM	EC011398
Diametro nominale	DN 100
Misure esterne (AxLxP)	300 x 450 x 270 mm
Peso	2,30 Kg (STK)
Gruppo prodotti	4
Numero tariffa doganale	73072980
Materiale / Colore	Edelstahl, Silber

Note d'uso

LORO-Balkonablauf mit Aufsatzelemente, Serie V-AK für Balkonabdichtung aus Flüssigkunststoffen im Wandbereich. Zweiteilige Ausführung für wärmegeämmte Balkone, mit aufgekanteten Klebeflansch für Einbau in Wand-oder Eckbereichen.

Download



Alles online

[Istruzioni di installazione \(PDF\)](#)

[Certificato \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Disegno dimensionale \(PDF\)](#)

[Aufbauschema \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Brochure \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)