


LX-AUFSATZELEMENT M.ECKAUFK.KLEBEFL.Z.

LORO-X surface-mounted element with corner upturned adhesive flange on-site crimping 125 to 250 mm
Series V-AK DN 50

Описание

LORO-X balcony drain mounting element for one piece version, series V-AK for balcony sealing made of liquid plastic in the wall corner area for balcony structure without covering, according to DIN EN 1253 with raised quality standard, made of stainless steel, consisting of: mounting element with bonding flange to be shortened by 125-250mm on site, sealing element DN70, made of stainless steel, DN50

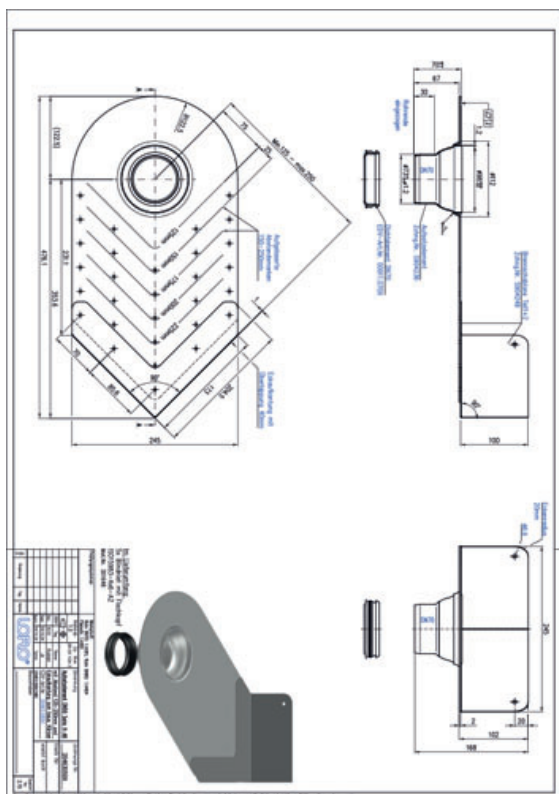

Данни за артикула

ЕАН код	4038088108994
ЕТИМ клас	EC011398
Номинален диаметър	DN 50
Външни размери (ВxШxД)	168 x 477 x 245 mm
Тегло	1,90 Kg (STK)
Продуктова група	4
Митнически тарифен номер	73072980
Материал / Цвят	Edelstahl, Silber

Забележка за употреба

LORO-Balkonablauf mit Aufsatzelemente, Serie V-AK für Balkonabdichtung aus Flüssigkunststoffen im Wandbereich. Zweiteilige Ausführung für wärmegeämmte Balkone, mit aufgekanteten Klebeflansch für Einbau in Wand-oder Eckbereichen.

Изтегляния



Alles online

[Инструкция за монтаж \(PDF\)](#)

[Сертификат \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[CAD чертеж \(PDF\)](#)

[Aufbauschema \(PDF\)](#)

[Брошура \(PDF\)](#)

[CAD 2D \(DXF\)](#)