


LX-AUFSATZELEMENT M.ECKAUFK.KLEBEFL.Z.

LORO-X surface-mounted element with corner upturned adhesive flange on-site crimping 125 to 250 mm
Series V-AK DN 50

Opis

LORO-X balcony drain mounting element for one piece version, series V-AK for balcony sealing made of liquid plastic in the wall corner area for balcony structure without covering, according to DIN EN 1253 with raised quality standard, made of stainless steel, consisting of: mounting element with bonding flange to be shortened by 125-250mm on site, sealing element DN70, made of stainless steel, DN50

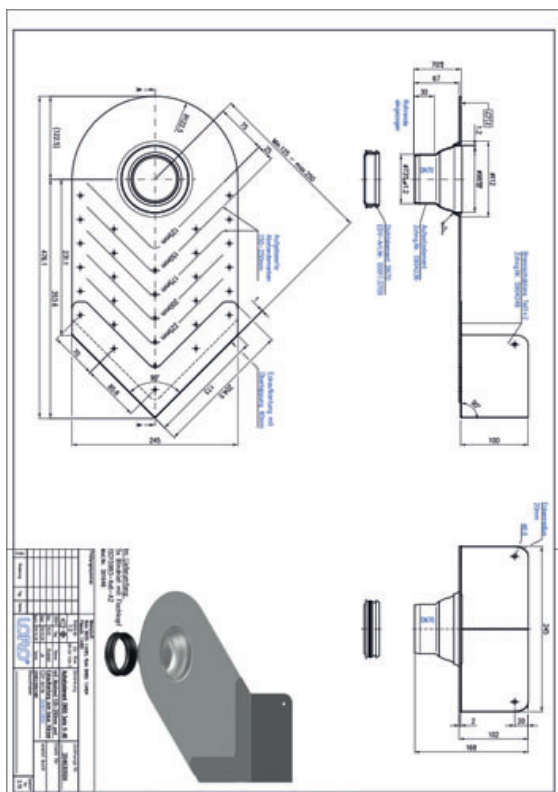

Podaci o artiklu

EAN kod	4038088108994
ETIM klasa	EC011398
Nazivni promjer	DN 50
Vanjske mjere (VxŠxD)	168 x 477 x 245 mm
Težina	1,90 Kg (STK)
Grupa proizvoda	4
Carinski tarifni broj	73072980
Materijal / Boja	Edelstahl, Silber

Napomena za upotrebu

LORO-Balkonablauf mit Aufsatzelemente, Serie V-AK für Balkonabdichtung aus Flüssigkunststoffen im Wandbereich. Zweiteilige Ausführung für wärmedämmte Balkone, mit aufgekanteten Klebeflansch für Einbau in Wand-oder Eckbereichen.

Preuzimanja



Alles online

[Upute za ugradnju \(PDF\)](#)

[Certifikat \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Dimenzijski crtež \(PDF\)](#)

[Aufbauschema \(PDF\)](#)

[Prospekt \(PDF\)](#)

[CAD 2D \(DXF\)](#)