


LX-AUFSATZELEMENT M.ECKAUFK.KLEBEFL.Z.

LORO-X surface-mounted element with corner upturned adhesive flange on-site crimping 125 to 250 mm
Series V-AK DN 50

Descrição

LORO-X balcony drain mounting element for one piece version, series V-AK for balcony sealing made of liquid plastic in the wall corner area for balcony structure without covering, according to DIN EN 1253 with raised quality standard, made of stainless steel, consisting of: mounting element with bonding flange to be shortened by 125-250mm on site, sealing element DN70, made of stainless steel, DN50

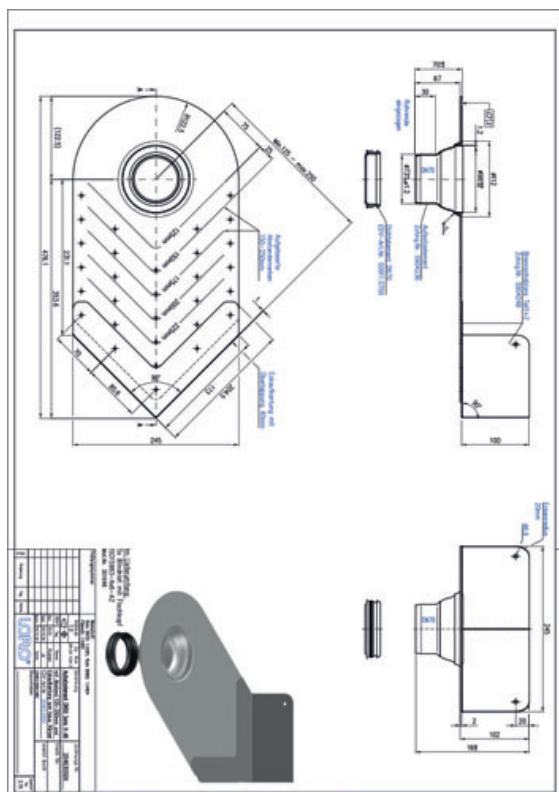

Dados do artigo

Código EAN	4038088108994
Classe ETIM	EC011398
Diâmetro nominal	DN 50
Medidas exteriores (AxLxP)	168 x 477 x 245 mm
Peso	1,90 Kg (STK)
Grupo de produtos	4
Número de pauta aduaneira	73072980
Material / Cor	Edelstahl, Silber

Nota de utilização

LORO-Balkonablauf mit Aufsatzelemente, Serie V-AK für Balkonabdichtung aus Flüssigkunststoffen im Wandbereich. Zweiteilige Ausführung für wärmegeämmte Balkone, mit aufgekanteten Klebeflansch für Einbau in Wand-oder Eckbereichen.

Transferências



Alles online

[Instruções de instalação \(PDF\)](#)

[Homologação \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Desenho cotado \(PDF\)](#)

[Aufbauschema \(PDF\)](#)

[Brochura \(PDF\)](#)

[CAD 2D \(DXF\)](#)