


LX-AUFSATZELEMENT M.ECKKAUFK.KLEBEFL.Z.

LORO-X surface-mounted element with corner upturned adhesive flange on-site crimping 125 to 250 mm
Series V-AK DN 50

Descrizione

LORO-X balcony drain mounting element for one piece version, series V-AK for balcony sealing made of liquid plastic in the wall corner area for balcony structure without covering, according to DIN EN 1253 with raised quality standard, made of stainless steel, consisting of: mounting element with bonding flange to be shortened by 125-250mm on site, sealing element DN70, made of stainless steel, DN50

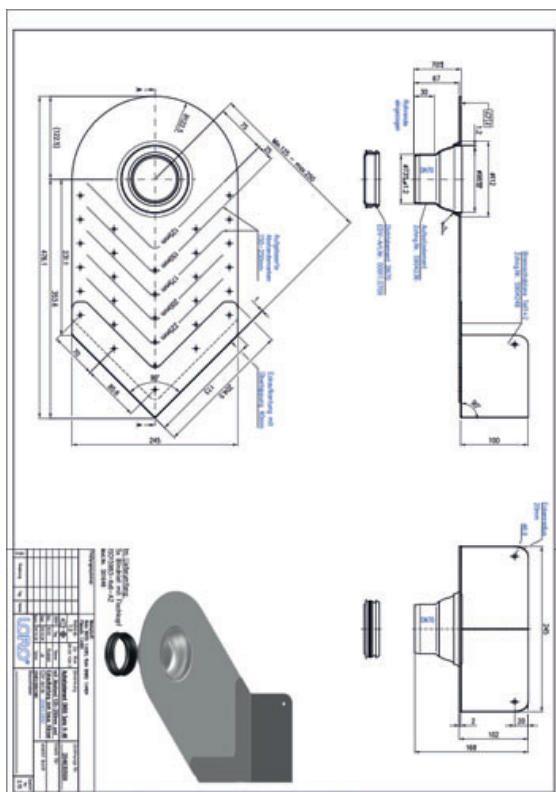

Dati articolo

Codice EAN	4038088108994
Classe ETIM	EC011398
Diametro nominale	DN 50
Misure esterne (AxLxP)	168 x 477 x 245 mm
Peso	1,90 Kg (STK)
Gruppo prodotti	4
Numero tariffa doganale	73072980
Materiale / Colore	Edelstahl, Silber

Note d'uso

LORO-Balkonablauf mit Aufsatzelemente, Serie V-AK für Balkonabdichtung aus Flüssigkunststoffen im Wandbereich. Zweiteilige Ausführung für wärmegeämmte Balkone, mit aufgekanteten Klebeflansch für Einbau in Wand-oder Eckbereichen.

Download



Alles online

[Istruzioni di installazione \(PDF\)](#)

[Certificato \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Disegno dimensionale \(PDF\)](#)

[Aufbauschema \(PDF\)](#)

[Brochure \(PDF\)](#)

[CAD 2D \(DXF\)](#)