


LX-AUFSATZELEMENT M.ECKAUFK.KLEBEFL.Z.

LORO-X surface-mounted element with corner upturned adhesive flange on-site crimping 125 to 250 mm
Series V-AK DN 50

Descripción

LORO-X balcony drain mounting element for one piece version, series V-AK for balcony sealing made of liquid plastic in the wall corner area for balcony structure without covering, according to DIN EN 1253 with raised quality standard, made of stainless steel, consisting of: mounting element with bonding flange to be shortened by 125-250mm on site, sealing element DN70, made of stainless steel, DN50

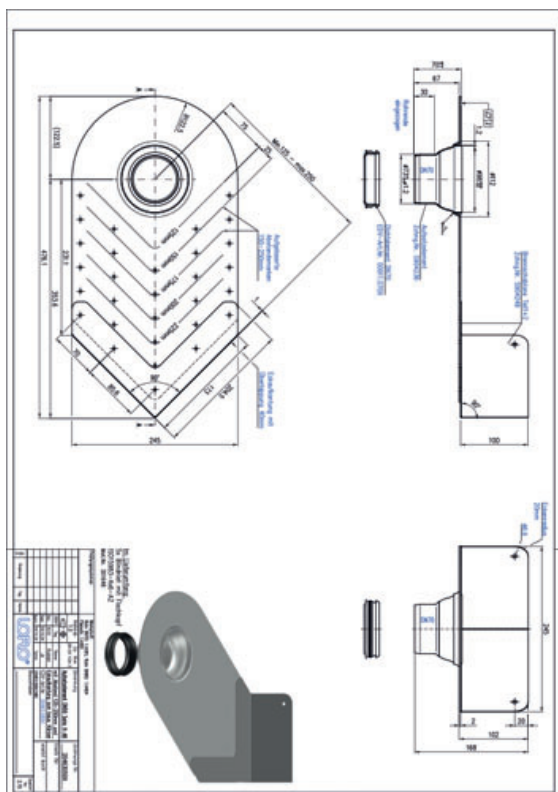

Datos del artículo

Código EAN	4038088108994
Clase ETIM	EC011398
Diámetro nominal	DN 50
Medidas exteriores (AxAxL)	168 x 477 x 245 mm
Peso	1,90 Kg (STK)
Grupo de productos	4
Número de arancel aduanero	73072980
Material / Color	Edelstahl, Silber

Nota de uso

LORO-Balkonablauf mit Aufsatzelemente, Serie V-AK für Balkonabdichtung aus Flüssigkunststoffen im Wandbereich. Zweiteilige Ausführung für wärmegeämmte Balkone, mit aufgekanteten Klebeflansch für Einbau in Wand-oder Eckbereichen.

Descargas



Alles online

[Instrucciones de instalación \(PDF\)](#)

[Certificado \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Dibujo dimensional \(PDF\)](#)

[Aufbauschema \(PDF\)](#)

[Folleto \(PDF\)](#)

[CAD 2D \(DXF\)](#)