


LX-AUFSATZELEMENT M.ECKAUFK.KLEBEFL.Z.

LORO-X surface-mounted element with corner upturned adhesive flange on-site crimping 125 to 250 mm
Series V-AK DN 50

Beskrivelse

LORO-X balcony drain mounting element for one piece version, series V-AK for balcony sealing made of liquid plastic in the wall corner area for balcony structure without covering, according to DIN EN 1253 with raised quality standard, made of stainless steel, consisting of: mounting element with bonding flange to be shortened by 125-250mm on site, sealing element DN70, made of stainless steel, DN50

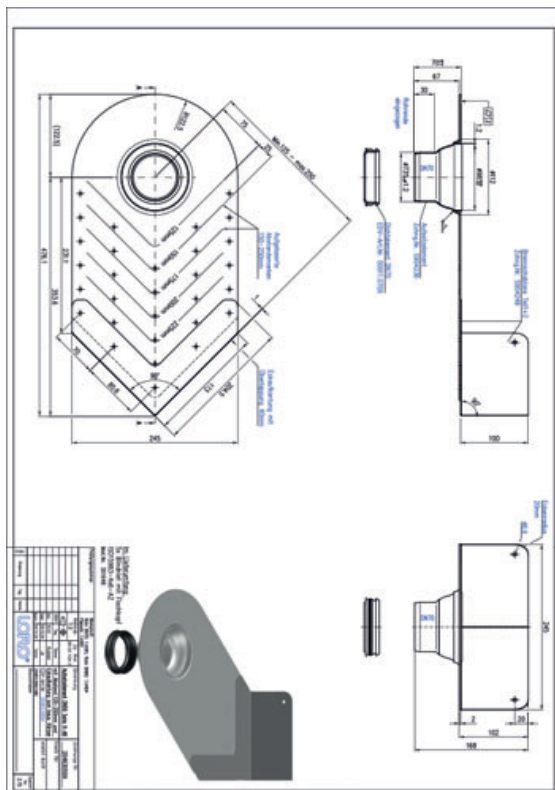

Artikkeldata

EAN-kode	4038088108994
ETIM-klasse	EC011398
Nominell diameter	DN 50
Utvendige mål (HxBxL)	168 x 477 x 245 mm
Vekt	1,90 Kg (STK)
Produktgruppe	4
Tolltariffnummer	73072980
Materiale / Farge	Edelstahl, Silber

Bruksanvisning

LORO-Balkonablauf mit Aufsatzelemente, Serie V-AK für Balkonabdichtung aus Flüssigkunststoffen im Wandbereich. Zweiteilige Ausführung für wärmedämmte Balkone, mit aufgekanteten Klebeflansch für Einbau in Wand-oder Eckbereichen.

Nedlastinger



Alles online

[Monteringsanvisning \(PDF\)](#)

[Godkjenning \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Måltegning \(PDF\)](#)

[Aufbauschema \(PDF\)](#)

[Brosjyre \(PDF\)](#)

[CAD 2D \(DXF\)](#)