
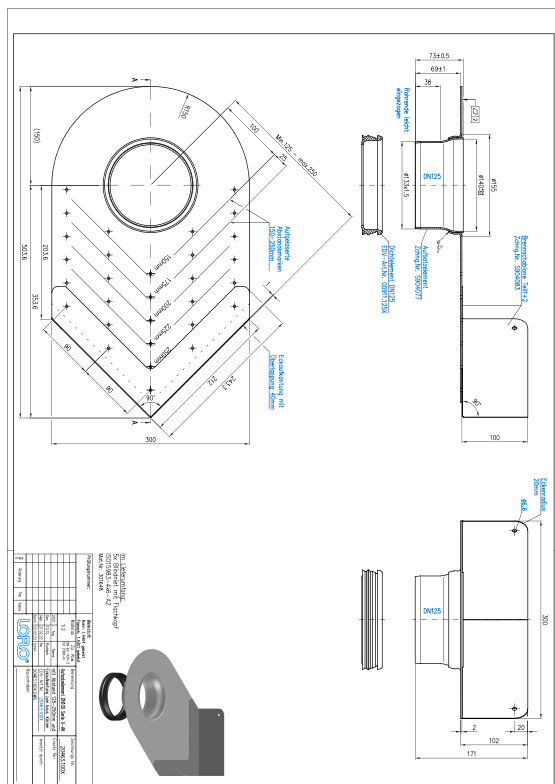


LX-AUFSATZELEMENT M.ECKAUFK.KLEBEFL.Z.

LORO-X surface-mounted element with corner upstand Adhesive flange on-site crimping 125 to 250 mm
Series V-AK DN 100

Description

LORO-X balcony drain mounting element for one piece version, series V-AK for balcony sealing made of liquid plastic in the wall corner area for balcony structure without covering, according to DIN EN 1253 with raised quality standard, made of stainless steel, consisting of: mounting element with bonding flange to be shortened by 125-250mm on site, sealing element DN125, made of stainless steel, DN100



Article information

EAN Code	4038088106297
ETIM Class	EC011398
Nominal diameter	DN 100
Outside measurements (HxWxL)	300 x 504 x 171 mm
Weight	2,00 Kg (STK)
Product group	4
Customs tariff number	73072980
Material / Color	Edelstahl, Silber

Usage note

LORO-Balkonablauf mit Aufsatzelemente, Serie V-AK für Balkonabdichtung aus Flüssigkunststoffen im Wandbereich. Zweiteilige Ausführung für wärmedämmte Balkone, mit aufgekanteten Klebeflansch für Einbau in Wand-oder Eckbereichen.

Downloads



Alles online

[Installation \(PDF\)](#)
[Certificate \(PDF\)](#)
[CAD 3D \(DWG\)](#)

[CAD drawing \(PDF\)](#)
[Aufbauschema \(PDF\)](#)
[BIM 3D \(STEP\)](#)

[Brochure \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[BIM 3D \(IFC\)](#)