


LX-AUFSATZELEMENT M.ECKAUFK.KLEBEFL.Z.

LORO-X surface-mounted element with corner upstand Adhesive flange on-site crimping 125 to 250 mm
Series V-AK DN 100

Descriere

LORO-X balcony drain mounting element for one piece version, series V-AK for balcony sealing made of liquid plastic in the wall corner area for balcony structure without covering, according to DIN EN 1253 with raised quality standard, made of stainless steel, consisting of: mounting element with bonding flange to be shortened by 125-250mm on site, sealing element DN125, made of stainless steel, DN100




Date articol

Cod EAN	4038088106297
Clasă ETIM	EC011398
Diametru nominal	DN 100
Dimensiuni exterioare (ÎxLxA)	300 x 504 x 171 mm
Greutate	2,00 Kg (STK)
Grupă de produse	4
Număr tarif vamal	73072980
Material / Culoare	Edelstahl, Silber

Notă de utilizare

LORO-Balkonablauf mit Aufsatzelemente, Serie V-AK für Balkonabdichtung aus Flüssigkunststoffen im Wandbereich. Zweiteilige Ausführung für wärmegeämmte Balkone, mit aufgekanteten Klebeflansch für Einbau in Wand-oder Eckbereichen.

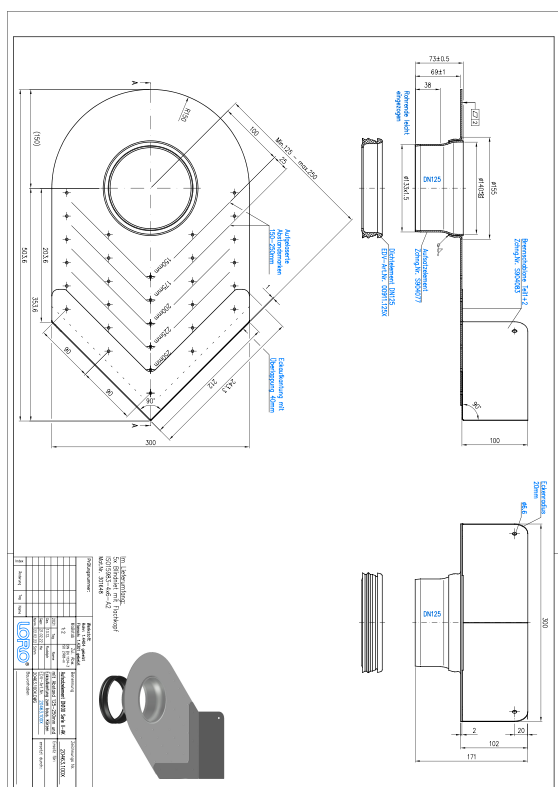

Descărcări



Alles online

[Instrucțiuni de montaj \(PDF\)](#)

[Certificat \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Desen CAD \(PDF\)](#)

[Aufbauschema \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Broșură \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)