
LORO-DJ FLAT ROOF DRAIN SIPHONIC FLOW 1-PART. CLAMBING FLANGE, VERTICAL, WITH THERMAL INSULATION AND HEATING DN 50

LORO-DRAINJET drain stainless steel clamping flange one-piece with heat insulation and heating DN 50

Tekst za troškovnik

LORO-X DRAINLET flat roof siphonic drain, series 49(DJ), one-piece, with thermal insulation and heating, vertical outlet, for main drainage with siphonic flow, discharge rate 9.0 l/s at 55 mm water level on the roof, with clamping flange as loose and fixed flange construction including compression seals, for bituminous and plastic roofing sheets, DRAINJET hood made of stainless steel, according to DIN EN 1253 with raised quality standard, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to LX data sheet LX1175, made of stainless steel, DN50



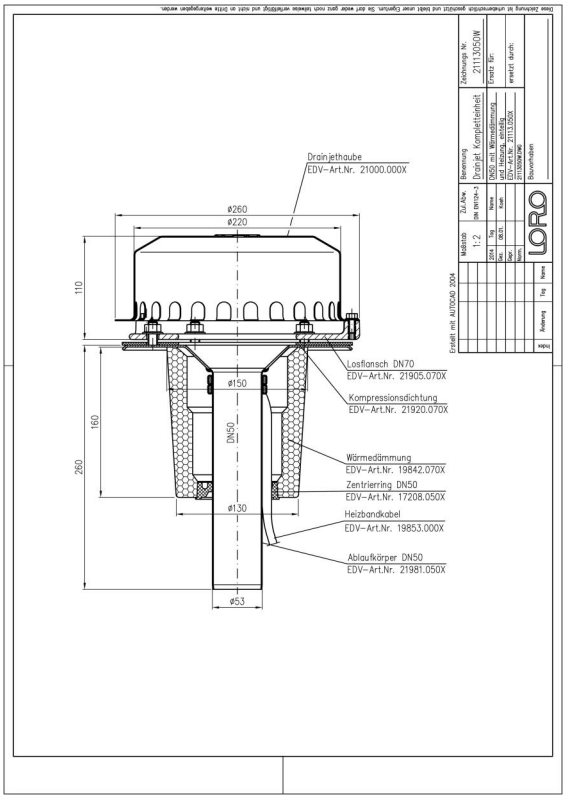

Podaci o artiklu

EAN kod	**4038088094624**
ETIM klasa	**EC011398**
Nazivni promjer	**DN 50**
Vanjske mjere (VxŠxD)	**260 x 260 x 378 mm**
Težina	**2,70 Kg (STK)**
Grupa proizvoda	**4**
Carinski tarifni broj	**73072980**
Materijal / Boja	**Edelstahl, Silber**

Napomena za upotrebu

Große Dachflächen können durch leistungsstarke Systeme mit Druckströmung wirtschaftlich und sicher entwässert werden. LORO-X Schnellablaufsysteme mit Druckströmung werden durch die höhere Strömungsgeschwindigkeit mit kleineren Rohrdurchmessern bei gleichzeitig höherer Abflussleistung betrieben. Die hohe Strömungsgeschwindigkeit im Rohr erhöht darüber hinaus den Selbstreinigungseffekt. Weitere Einsatzbeispiele finden Sie mit detailierter Beschreibung in unserem Aktuell für LORO-X DRAINJET Schnellablaufsysteme. Einsatzgebiete: Industriedächer, Gewerbe, Warmdächer, Kaltdächer, Kastenrinnen, Tiefpunktlinien, Schnellablaufsysteme, große Dachflächen, Stadien, Lagerhallen, Logistikzentren.

Preuzimanja

Alles online

Upute za ugradnju (PDF)
Certifikat (PDF)
CAD 2D (DXF)
Dimenzijski crtež (PDF)
Aufbauschema (PDF)
CAD (DWG)
Prospekt (PDF)
Tehnički list sustava LX 1175