

LORO-DL MINI ABLAUF,KLEMMFL.1-TLG.O.WD.

LORO-DRAINLET Mini drain clamp flange one-piece without insulation for box drain DN 50

Popis

LORO-X DRAINLET-Mini, series 84(DL), one-piece, vertical outlet, for main drainage with gravity flow, discharge rate 2.7 l/s at 35 mm water level on the roof, with clamping flange as loose and fixed flange construction including compression seals, DRAINLET-Mini hood made of stainless steel, according to DIN EN 1253 with raised quality standard, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to LX specification sheet LX1391, made of stainless steel, DN50




Údaje o artikli

EAN kód	4038088095270
ETIM trieda	EC011398
Menovitý priemer	DN 50
Vonkajšie rozmery (VxŠxH)	199 x 175 x 175 mm
Hmotnosť	1,20 Kg (STK)
Skupina produktov	4
Colný sadzobník	73072980
Materiál / Farba	Edelstahl, Silber

Pokyny na použitie

Der LORO-X DRAINLET Mini zeichnet sich durch platzsparende Maße (145 mm Flanschdurchmesser) aus und eignet sich daher z.B. für Kastenrinnen, Carports und kleine Dachflächen. Einsatzgebiete: Kastenrinnen ab 150 mm Breite, Gesimsrinnen, Garagen, Carports, Fertiggaragen, Vordächer, kleine Dachflächen.

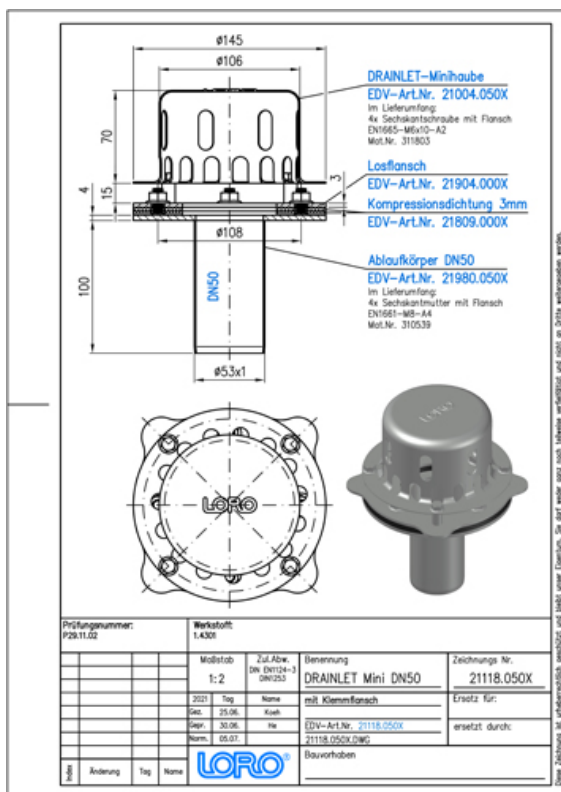

Na stiahnutie



Alles online

[Návod na montáž \(PDF\)](#)
[Certifikát \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[BIM 3D \(IFC\)](#)

[Rozmerový výkres \(PDF\)](#)
[Systémový dátový list LX 1391](#)
[CAD 3D \(DWG\)](#)

[Prospekt \(PDF\)](#)
[Systémový dátový list LX 1641](#)
[BIM 3D \(STEP\)](#)