

## LORO-DL MINI ABLAUF,KLEMMFL.1-TLG.O.WD.

LORO-DRAINLET Mini drain clamping flange one-piece without external insulation for box drain DN 70

### Kuvaus

LORO-X DRAINLET-Mini, series 84(DL), one-piece, vertical outlet, for main drainage with gravity flow, discharge rate 2.5 l/s at 35 mm water level on the roof, with clamping flange as loose and fixed flange construction including compression seals, DRAINLET-Mini hood made of stainless steel, according to DIN EN 1253 with raised quality standard, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to LX specification sheet LX3045, made of stainless steel, DN70




### Tuotetiedot

|                      |                    |
|----------------------|--------------------|
| EAN-koodi            | 4038088104316      |
| ETIM-luokka          | EC011398           |
| Nimellishalkaisija   | DN 70              |
| Ulkomitat (KxLxS)    | 199 x 175 x 175 mm |
| Paino                | 1,20 Kg (STK)      |
| Tuoteryhmä           | 4                  |
| Tullitariffin numero | 73072980           |
| Materiaali / Väri    | Edelstahl, Silber  |

### Käyttöohje

Der LORO-X DRAINLET Mini zeichnet sich durch platzsparende Maße (145 mm Flanschdurchmesser) aus und eignet sich daher z.B. für Kastenrinnen, Carports und kleine Dachflächen. Einsatzgebiete Kastenrinnen ab 150 mm Breite, Gesimsrinnen, Garagen, Carports, Fertiggaragen, Vordächer, kleine Dachflächen.

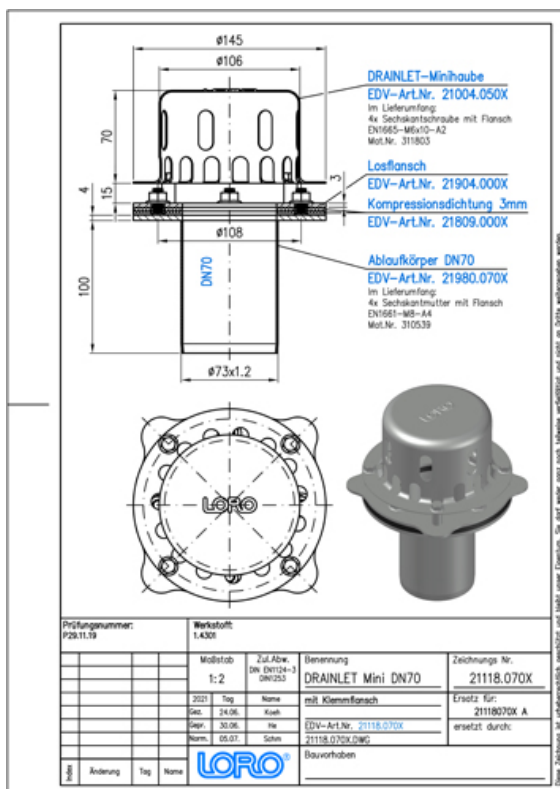

### Lataukset



Alles online

[Asennusohje \(PDF\)](#)

[Hyväksyntä \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Mittapiirustus \(PDF\)](#)

[Järjestelmän datalehti LX 3045](#)

[BIM 3D \(STEP\)](#)

[Esite \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)